

## PRELIMINARY

PM200CLA060

FLAT-BASE TYPE  
INSULATED PACKAGE

Notice : This is not a final specification. Some parametric limits are subject to change.

PM200CLA060

Pre. T.Marumo

Rev. A

Apr. M.Yamamoto May 23.2003

*T. Marumo**m.yamamoto July 12, 2003*

## Feature


- a) Adopting new 5th generation IGBT(CSTBT) chip, which performance is improved by  $1\mu\text{m}$  fine rule process.  
 For example, typical  $V_{ce(\text{sat})}=1.5\text{V}$  @ $T_j=125^\circ\text{C}$
- b) I adopt the over-temperature conservation by  $T_j$  detection of CSTBT chip, and error output is possible from all each conservation upper and lower arm of IPM.

OUTLINE DRAWING Dimensions in mm

See Page 7

- 3φ 200A, 600V Current-sense IGBT type inverter
- Monolithic gate drive & protection logic
- Detection, protection & status indication circuits for, short-circuit, over-temperature & under-voltage (P-Fo available from upper arm devices)
- Acoustic noise-less 22kW class inverter application

APPLICATION : General purpose inverter, servo drives and other motor controls

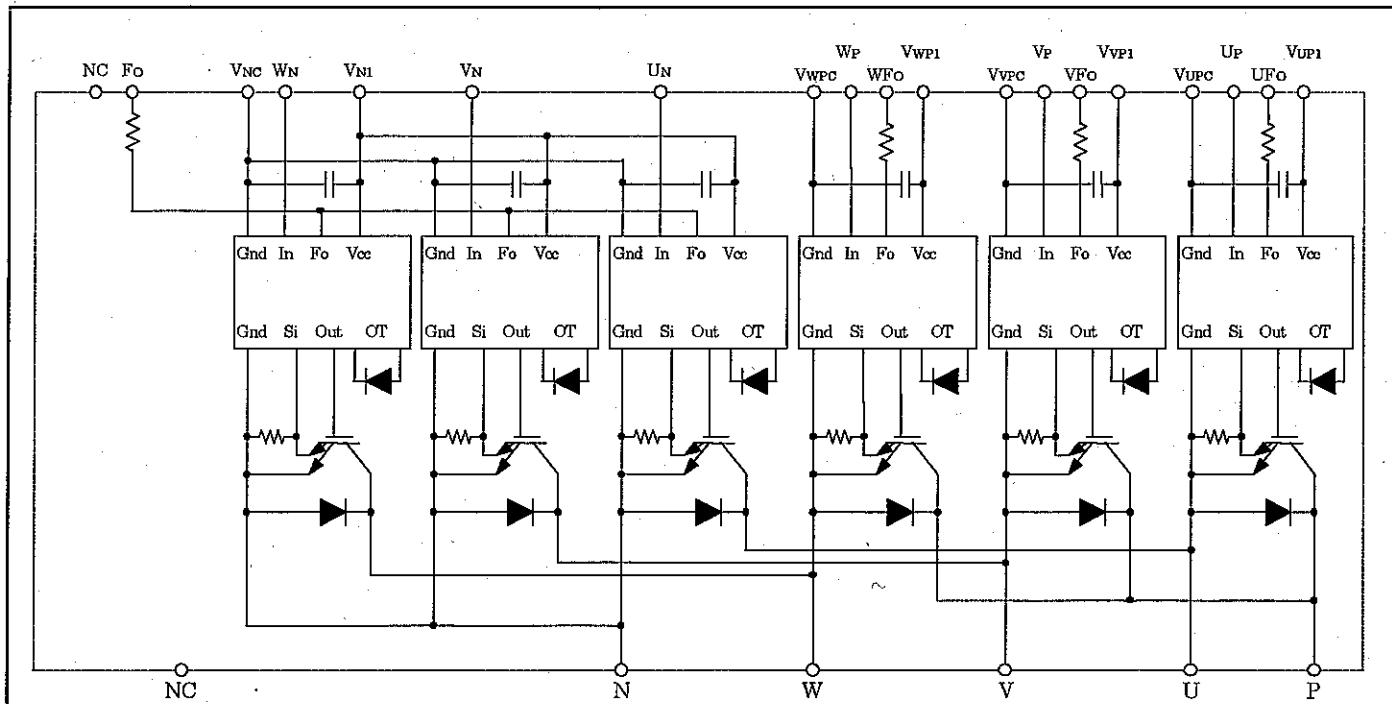

Maximum Ratings ( $T_j = 25^\circ\text{C}$ , unless otherwise noted)

## Inverter Part


Item	Symbol	Condition	Ratings	Unit	
Collector-Emitter Voltage	$V_{CES}$	$V_D = 15\text{V}, V_{CIN} = 15\text{V}$	600	V	
Collector Current	$\pm I_C$	$T_c = 25^\circ\text{C}$	200	A	
Collector Current (Peak)	$\pm I_{CP}$	$T_c = 25^\circ\text{C}$	400	A	
Collector Dissipation	$P_C$	$T_c = 25^\circ\text{C}$	(Note-1)	595	W
Junction Temperature	$T_j$			-20 ~ +150	°C

## Control Part

Item	Symbol	Condition	Rating	Unit
Supply Voltage	$V_D$	Applied between : $V_{UP1}\text{-}V_{UPC}$ $V_{VP1}\text{-}V_{VPC}$ , $V_{WP1}\text{-}V_{WPC}$ , $V_{N1}\text{-}V_{NC}$	20	V
Input Voltage	$V_{CIN}$	Applied between : $U_P\text{-}V_{UPC}$ , $V_P\text{-}V_{VPC}$ $W_P\text{-}V_{WPC}$ , $U_N\text{-}V_N\text{-}W_N\text{-}V_{NC}$	20	V
Fault Output Supply Voltage	$V_{FO}$	Applied between : $U_{FO}\text{-}V_{UPC}$ , $V_{FO}\text{-}V_{VPC}$ $W_{FO}\text{-}V_{WPC}$ , $F_O\text{-}V_{NC}$	20	V
Fault Output Current	$I_{FO}$	Sink current at $U_{FO}$ , $V_{FO}$ , $W_{FO}$ , $F_O$ terminals	20	mA

## Total System

Item	Symbol	Condition	Rating	Unit
Supply Voltage Protected by SC	$V_{CC(\text{PROT})}$	$V_D = 13.5\sim 16.5\text{V}$ Inverter Part, $T_j = +125^\circ\text{C}$ Start	400	V
Supply Voltage (Surge)	$V_{CC(\text{surge})}$	Applied between : P-N, Surge value	550	V
Module Case Operating Temperature	$T_c$	(Note-1)	-20 ~ +100	°C
Storage Temperature	$T_{\text{stg}}$		-40 ~ +125	°C
Isolation Voltage	$V_{iso}$	60Hz, Sinusoidal Charged part to Base, AC 1 min.	2500	Vrms

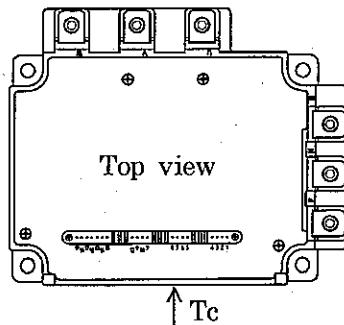(Note-1)  $T_c$ (base plate) measurement point is below.

## Thermal Resistances

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Junction to case Thermal Resistances	R <sub>th(j-c)Q</sub>	Inverter IGBT part ( per 1/6 ) (Note-2)	—	—	0.16*	°C/W
	R <sub>th(j-c)F</sub>	Inverter FWDi part ( per 1/6 ) (Note-2)	—	—	0.24*	
	R <sub>th(j-c)Q</sub>	Inverter IGBT part ( per 1/6 ) (Note-1)	—	—	0.21	
	R <sub>th(j-c)F</sub>	Inverter FWDi part ( per 1/6 ) (Note-1)	—	—	0.31	
Contact Thermal Resistance	R <sub>th(c-f)</sub>	Case to fin, ( per 1 module ) Thermal grease applied (Note-1)	—	—	0.023	

(Note-2) T<sub>c</sub> measurement point is just under the chip.\* If you use this value, R<sub>th(f-a)</sub> should be measured just under the chips.Electrical Characteristics (T<sub>j</sub> = 25°C unless otherwise noted)

## Inverter Part

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	
Collector-Emitter Saturation Voltage	V <sub>CES</sub> (sat)	V <sub>D</sub> = 15V, V <sub>CIN</sub> = 0V	—	1.6	2.1	V	
		I <sub>C</sub> = 200A, Pulsed Fig.1	T <sub>j</sub> = 125°C	—	1.5		
FWDi Forward Voltage	VEC	I <sub>C</sub> = 200A, V <sub>CIN</sub> = 15V V <sub>D</sub> = 15V	Fig.2	—	2.2	3.3	V
Switching Time	ton	V <sub>D</sub> = 15V, V <sub>CIN</sub> = 0V ↔ 15V V <sub>CC</sub> = 300V, I <sub>C</sub> = 200A T <sub>j</sub> = 125°C, Inductive Load	0.5	1.0	2.4	μs	
	trr		—	0.2	0.4		
	t <sub>c(on)</sub>		—	0.4	1.0		
	toff		Fig.3,4	—	1.2	2.5	
	t <sub>c(off)</sub>		—	0.5	1.0		
Collector-Emitter Cutoff Current	ICES	V <sub>CE</sub> = V <sub>CES</sub>	T <sub>j</sub> = 25°C	—	—	1	mA
		V <sub>D</sub> = 15V	Fig.5	T <sub>j</sub> = 125°C	—	10	

## Control Part

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	
Circuit Current	I <sub>D</sub>	V <sub>D</sub> = 15V	V <sub>N1</sub> -V <sub>NC</sub>	—	18	28	mA
		V <sub>CIN</sub> = 15V	V <sub>XP1</sub> -V <sub>XPC</sub>	—	6	12	
Input ON Threshold Voltage	V <sub>th(ON)</sub>	Applied between : U <sub>P</sub> -V <sub>UPC</sub> , V <sub>P</sub> -V <sub>VPC</sub> W <sub>P</sub> -V <sub>WPC</sub> , U <sub>N</sub> -V <sub>N</sub> , W <sub>N</sub> -V <sub>NC</sub>	1.2	1.5	1.8	V	
			1.7	2.0	2.3		
Short Circuit Trip Level	SC	-20 ≤ T <sub>j</sub> ≤ 125°C V <sub>D</sub> = 15V	Fig.3,6	400	—	—	A
Short Circuit Current Delay Time	toff(SC)	V <sub>D</sub> = 15V	Fig.3,6	—	0.2	—	μs
Over Temperature Protection	OT	Detect T <sub>j</sub> of IGBT chip	Trip level	135	145	155	°C
			Reset level	—	125	—	
Supply Circuit Under-Voltage Protection	UV	-20 ≤ T <sub>j</sub> ≤ 125°C	Trip level	11.5	12.0	12.5	V
			Reset level	—	12.5	—	
Fault Output Current	I <sub>FO(H)</sub>	V <sub>D</sub> = 15V, V <sub>CIN</sub> = 15V	—	—	0.01	mA	
			(Note-3)	—	10	15	
Minimum Fault Output Pulse Width	t <sub>FO</sub>	V <sub>D</sub> = 15V	(Note-3)	1.0	1.8	—	ms

(Note-3) Fault output is given only when the internal SC, OT &amp; UV protections schemes of either upper or lower arm device operate to protect it.

## Mechanical Ratings and characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Mounting torque	—	Main terminal screw : M 5	2.5	3.0	3.5	N · m
Mounting torque	—	Mounting part screw : M 5	2.5	3.0	3.5	N · m
Weight	—	—	—	800	—	g

## Recommended Conditions For Use

Item	Symbol	Condition	Recommended value	Unit
Supply Voltage	V <sub>CC</sub>	Applied across P-N terminals	≤ 400	V
Control Supply Voltage	V <sub>D</sub>	Applied between : V <sub>UP1</sub> -V <sub>UPC</sub> , V <sub>VP1</sub> -V <sub>VPC</sub> , V <sub>WP1</sub> -V <sub>WPC</sub> , V <sub>N1</sub> -V <sub>NC</sub> (Note-4)	15.0±1.5	V
Input ON Voltage	V <sub>CIN(ON)</sub>	Applied between : U <sub>P</sub> -V <sub>UPC</sub> , V <sub>P</sub> -V <sub>VPC</sub> W <sub>P</sub> -V <sub>WPC</sub> , U <sub>N</sub> -V <sub>N</sub> , W <sub>N</sub> -V <sub>NC</sub>	≤ 0.8	V
Input OFF Voltage	V <sub>CIN(OFF)</sub>		≥ 9.0	
PWM Input Frequency	f <sub>PWM</sub>	Using Application Circuit of Fig.8	≤ 20	kHz
Arm Shoot-through Blocking Time	t <sub>dead</sub>	For IPM's each input signals Fig.7	≥ 2.0	μs

(Note-4) With ripple satisfying the following conditions  
 $dv/dt$  swing ≤ ±5V/μs, Variation ≤ 2V peak to peak

## Precautions for testing

1. Before applying any control supply voltage ( V<sub>D</sub> ), the input terminals should be pulled up by resistors, etc. to their corresponding supply voltage and each input signal should be kept off state. After this, the specified ON and OFF level setting for each input signal should be done.
2. When performing "SC" tests, the turn-off surge voltage spike at the corresponding protection operation should not be allowed to rise above V<sub>CES</sub> rating of the device.  
 ( These test should not be done by using a curve tracer or its equivalent. )

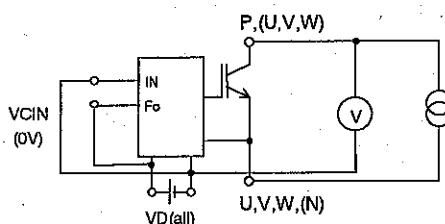


Fig.1 VCE(sat) Tset


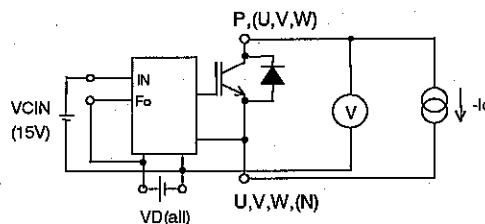


Fig.2 VEC Tset

a) Lower Arm Switching

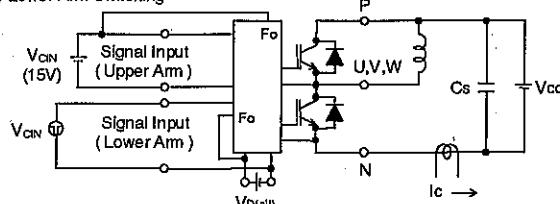

b) Upper Arm Switching

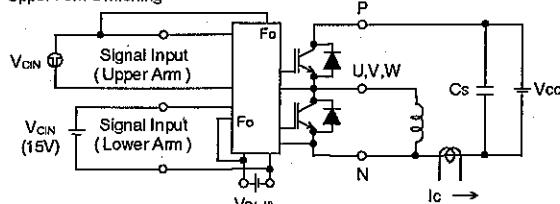


Fig.3 Switching time and SC test circuit

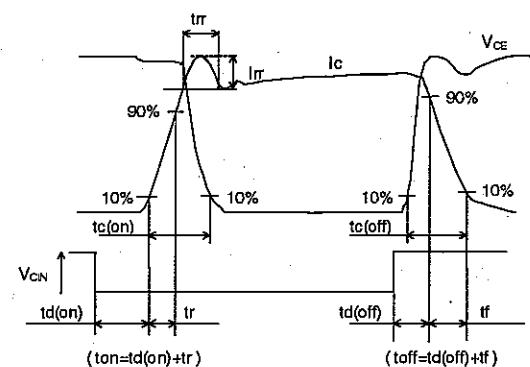


Fig.4 Switching time test waveform

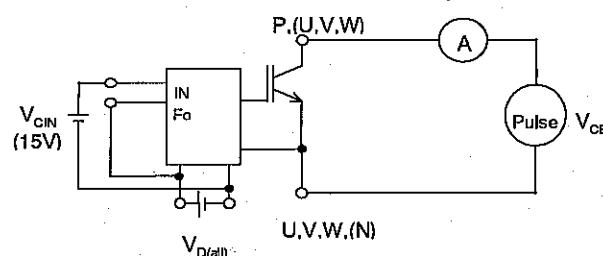


Fig.5 ICES Test



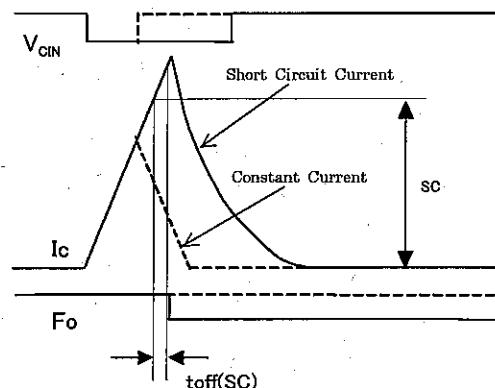


Fig.6 SC test waveform

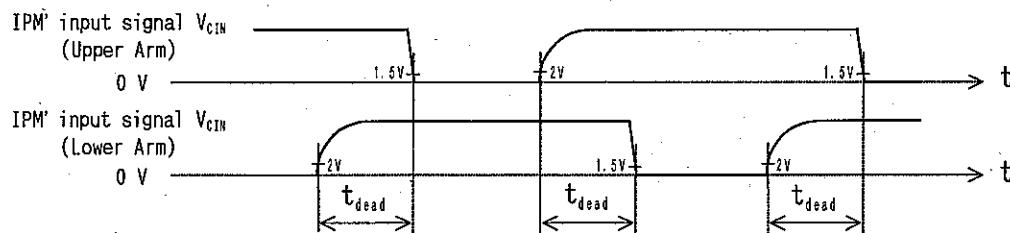

1.5V: Input on threshold voltage  $V_{th(on)}$  typical value, 2V: Input off threshold voltage  $V_{th(off)}$  typical value

Fig.7 Dead time measurement point example

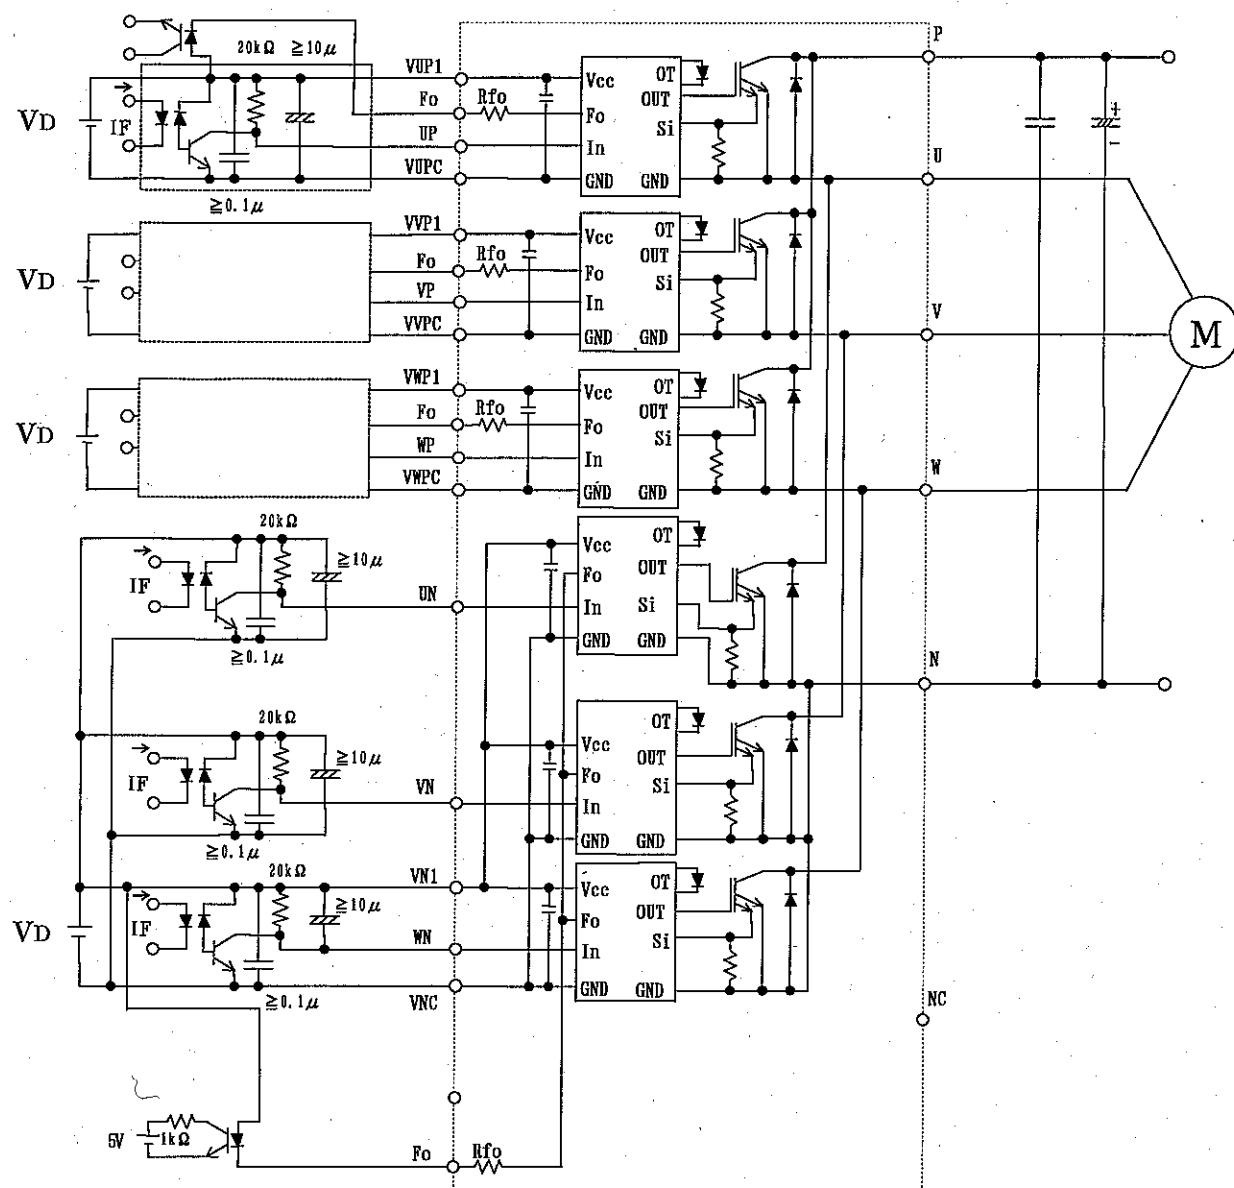

: Interface which is the same as the U-phase


Fig. 8 Application Example Circuit

#### Notes for stable and safe operation :

- Design the PCB pattern to minimize wiring length between opto-coupler and IPM's input terminal, and also to minimize the stray capacity between the input and output wirings of opto-coupler.
- Connect low impedance capacitor between the Vcc and GND terminal of each fast switching opto-coupler.
- Fast switching opto-couplers :  $t_{PLH}, t_{PHL} \leq 0.8 \mu s$ , Use High CMR type.
- Slow switching opto-coupler :  $CTR > 100\%$
- Use 4 isolated control power supplies ( VD ). Also, care should be taken to minimize the instantaneous voltage change of the power supply.
- Make inductance of DC bus line as small as possible, and minimize surge voltage using snubber capacitor between P and N terminal.
- Use line noise filter capacitor ( ex. 4.7nF ) between each input AC line and ground to reject common mode noise from AC line and improve noise immunity of the system.

Outline drawings

[Dimensions in mm]

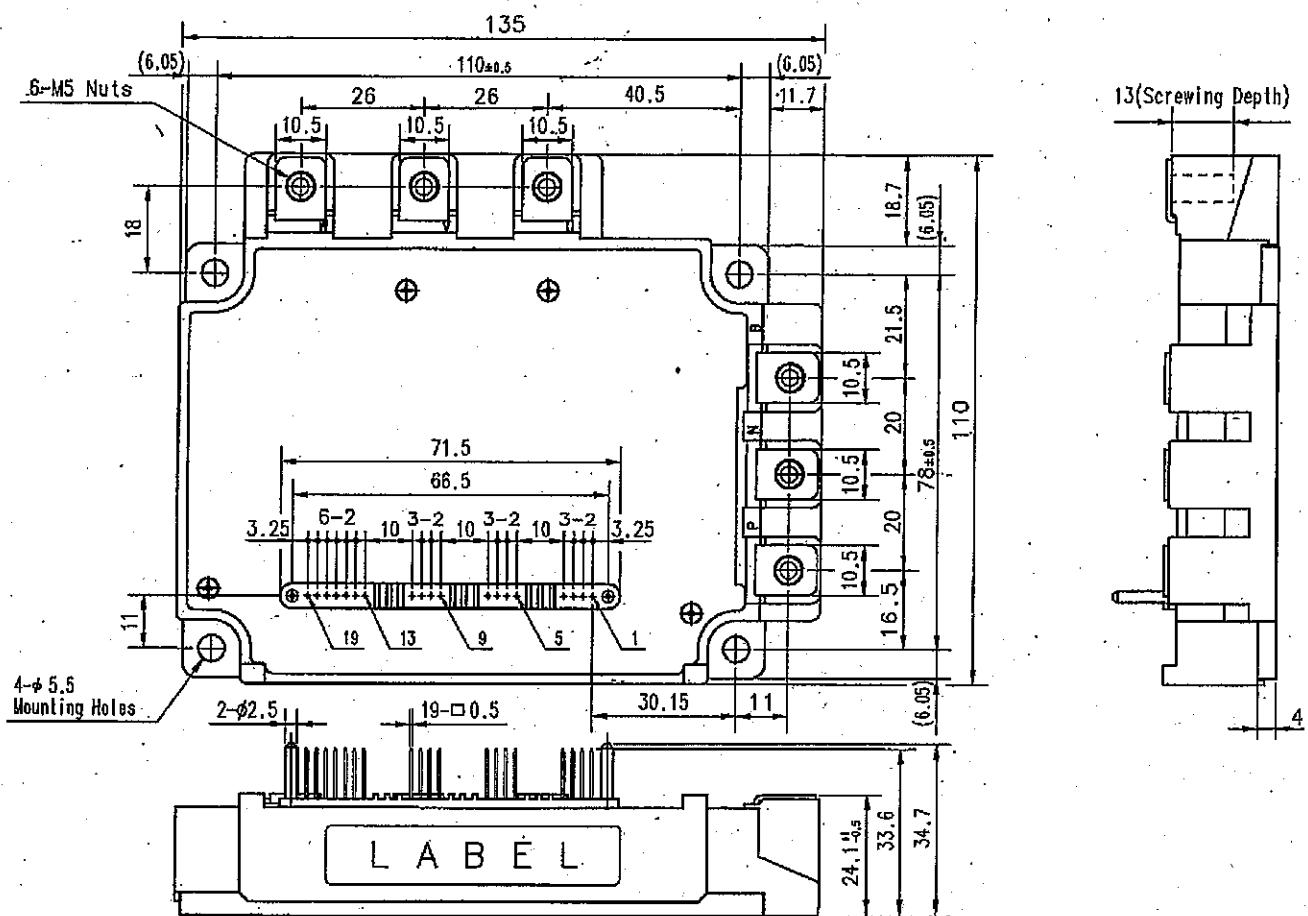

## Terminal code

1. VUPC	6. VFO	11. WP	16. UN
2. UFO	7. VP	12. VWP1	17. VN
3. UP	8. VVP1	13. VNC	18. WN
4. VUP1	9. VWPC	14. VN1	19. Fo
5. VVPC	10. WFO	15. NC	