
MK71050-02

Preliminary

Bluetooth® Low Energy wireless module

■ Overview


MK71050-02 is a Bluetooth® Low Energy (here in after LE) wireless module which is integrating ML7105C-001 Bluetooth LE SoC, E2PROM, 26MHz crystal oscillator, 2.4GHz PCB pattern antenna and passive components. It has Bluetooth® LE compliant 2.4GHz band radio communication capability.

MK71050-02 is suitable for applications such as Healthcare device, Remote Controller or PC peripherals.


■ Features

- Bluetooth® SIG Core Spec v4.0 compliant
- Integrating ML7105C-001 Bluetooth® LE single mode LSI
- Integrating 26MHz xtal oscillator
- Integrating 128kbit EEPROM
- Single power supply 1.8V to 3.6V
- Operating Temperature -20 deg.C to 70 deg.C
- Current Consumptions
 - Deep Sleep Mode 0.8uA (Typ.) (with external Low Power Clock)
 - Idle Mode 3mA (Typ.)
 - TX mode 9mA (Typ.)
 - RX mode 9mA (Typ.)
- Dimension 10.0mm(W) x 13.00mm (L) x 1.56mm (H)
- Pb Free, RoHS compliant
- Product Name MK71050-02

■ Block Diagram

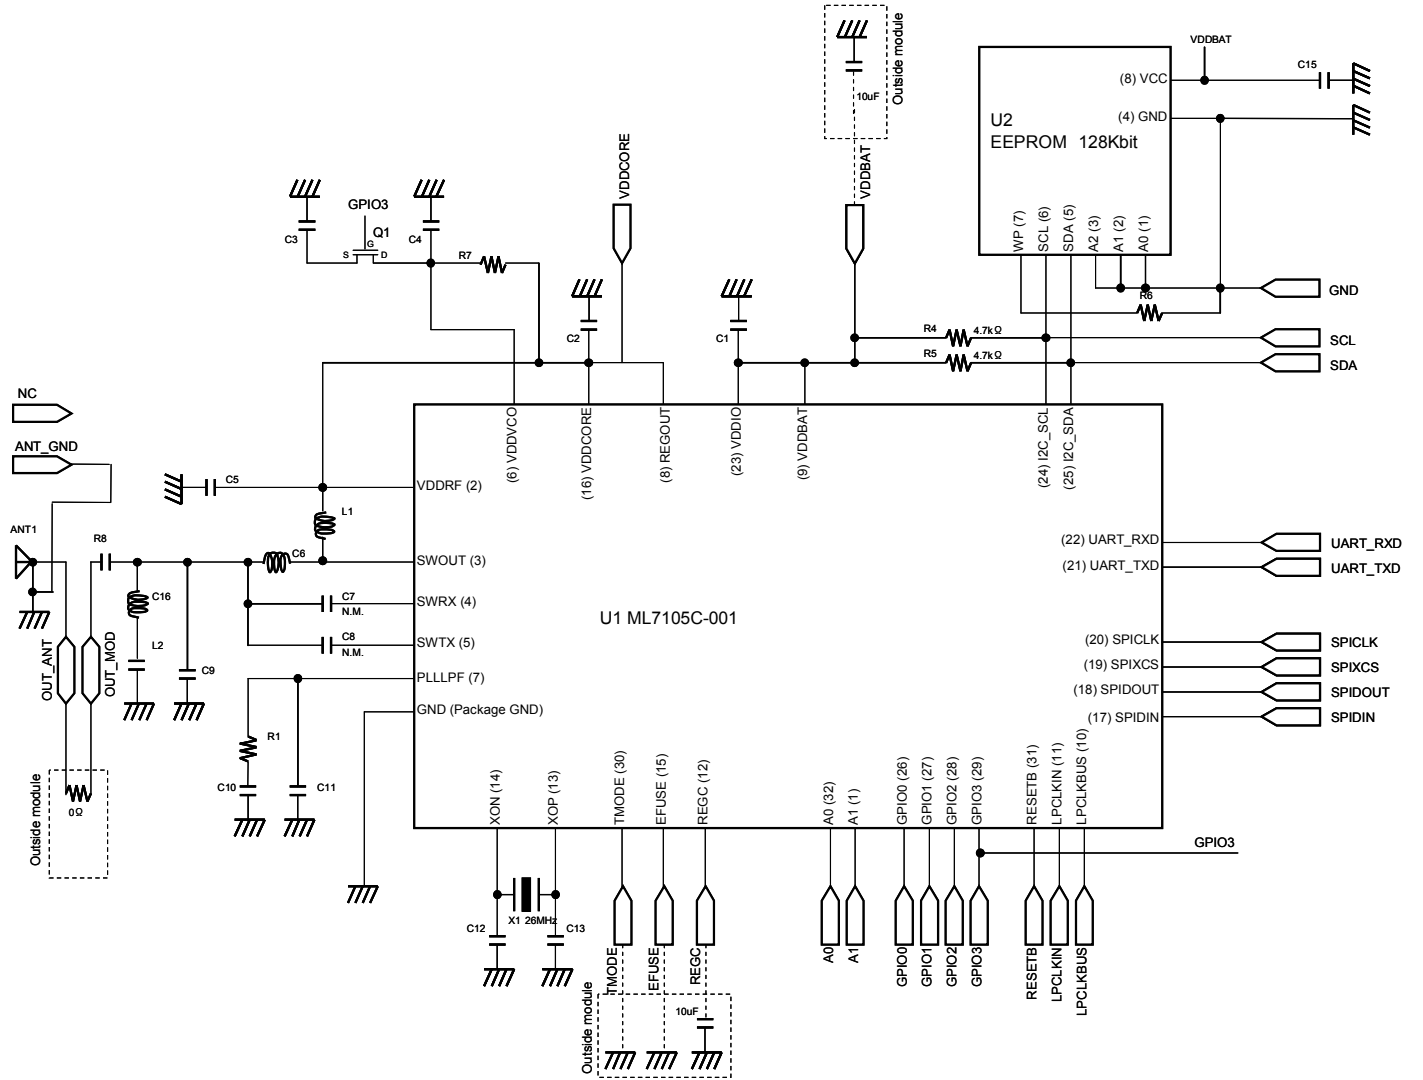

■ Pin assignment

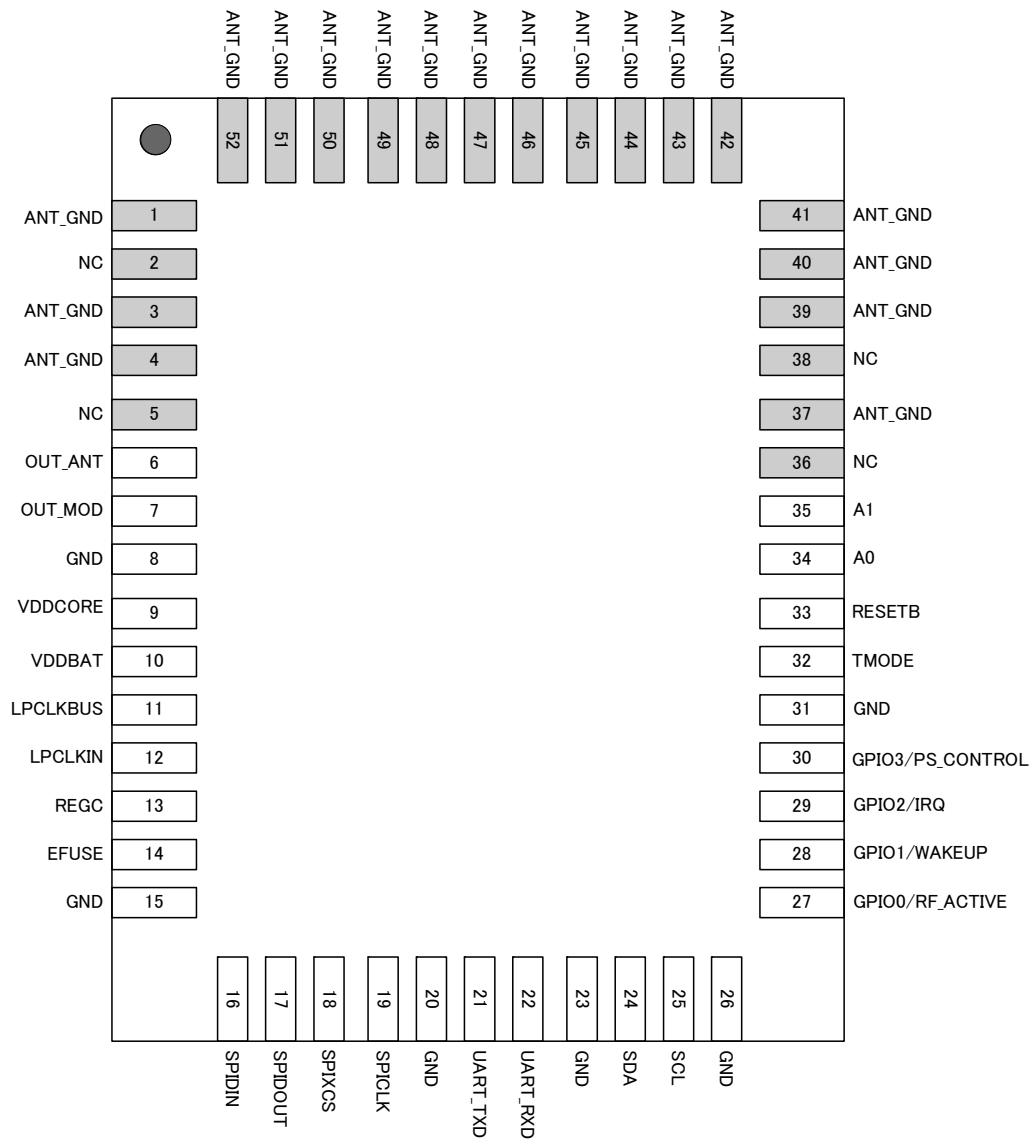

TOP VIEW

■ Pin definitions

No	Pin Name	I/O	Ana/Dig	I/O type	Function
1	ANT_GND	---	---	---	Antenna GND (※Refer to PIN descriptions.)
2	NC	---	---	---	No connection (※Refer to PIN descriptions.)
3-4	ANT_GND	---	---	---	Antenna GND (※Refer to PIN descriptions.)
5	NC	---	---	---	No connection (※Refer to PIN descriptions.)
6	OUT_ANT	INOUT	ANA	---	Output from Antenna (to be connected to OUT_MOD by user's PCB)
7	OUT_MOD	INOUT	ANA	---	Output from Module (to be connected to OUT_ANT by user's PCB)
8	GND1	---	GND	GND	GND
9	VDDCORE	---	PWR	VCC	Internally generated power supply,
10	VDDBAT	---	PWR	VCC	Power supply 1.8 to 3.6V, require 10uF capacitor.
11	LPCLKBUS	INOUT	ANA	DIRIO	Low Power clock output
12	LPCLKIN	INOUT	ANA	DIRIO	Low Power clock input
13	REGC	OUT	ANA	DIRIO	REGOUT, require 10uF capacitor.
14	EFUSE	---	DIG	DIRIO	Control signal for EFUSE programming, fix to GND for normal usage
15	GND2	---	GND	GND	GND
16	SPIDIN	IN	DIG	CMOS, IN	Data input for SPI slave
17	SPIDOUT	INOUT	DIG	CMOS, BiDIR	Data output for SPI slave
18	SPIXCS	IN	DIG	CMOS, IN	Chip select for SPI slave
19	SPICLK	IN	DIG	CMOS, IN	Clock input for SPI slave
20	GND3	---	GND	GND	GND
21	UART_TXD	OUT	DIG	CMOS, OUT	Data TX port for UART
22	UART_RXD	IN	DIG	CMOS, IN	Data RX port for UART
23	GND4	---	GND	GND	GND
24	SDA	INOUT	DIG	CMOS, BiDIR	SDA data port for I2C
25	SCL	INOUT	DIG	CMOS, BiDIR	SCL clock port for I2C
26	GND5	---	GND	GND	GND
27	GPIO0/RF_ACTIVE	INOUT	DIG	CMOS, BiDIR	GPIO inout/RF_Active
28	GPIO1/WAKEUP	INOUT	DIG	CMOS, BiDIR	GPIO inout/WAKEUP
29	GPIO2/IRQ	INOUT	DIG	CMOS, BiDIR	GPIO inout/IRQ
30	GPIO3/PS_CONTROL	INOUT	DIG	CMOS, BiDIR	GPIO inout/external switch control (Q1)
31	GND6	---	GND	GND	GND
32	TMODE	IN	DIG	CMOS, IN	Test mode control, fix to GND for normal usage
33	RESETB	IN	DIG	CMOS, IN	Reset, low active
34	A0	IN	ANA	DIRIO	Analog Test Pin0
35	A1	IN	ANA	DIRIO	Analog Test Pin1
36	NC	---	---	---	No connection (※Refer to PIN descriptions.)

37	ANT_GND	---	---	---	Antenna GND (※Refer to PIN descriptions.)
38	NC	---	---	---	No connection (※Refer to PIN descriptions.)
39-52	ANT_GND	---	---	---	Antenna GND (※Refer to PIN descriptions.)

■ PIN descriptions

I/O symbol	I _{RF}	:	RF input output pin
	I	:	Digital input pin
	I _{pd}	:	Digital input with pull-down resistor
	I _{AH}	:	Analog High voltage input pin
	I _{SH}	:	Low power clock input pin
	X _{SH}	:	Low power clock oscillator pin
	O ₂	:	Digital output pin with 2mA load capability
	B2	:	Digital bidirectional pin with 2mA load capability
	B2PU	:	Digital bidirectional pin with 2mA load capability and pull-up resistor

● RF, Analog signals

#	Pin Name	Status/Value at reset	I/O	Active Level	Function
6	OUT_ANT		I _{RF}	---	Output from Antenna (to be connected to OUT_MOD by user's PCB)
7	OUT_MOD		I _{RF}	---	Output from Module (to be connected to OUT_ANT by user's PCB)
34	A0	Hi-Z	I _{AH}	---	Analog test pin0
35	A1	Hi-Z	I _{AH}	---	Analog test pin1

● XO, LPXO signals

#	Pin Name	Status/Value at reset	I/O	Active Level	Function
11	LPCLKBUS	0V	X _{SH}	---	Low power clock crystal output
12	LPCLKIN	I _{SH}	X _{SH} , I _{SH}	---	Low power clock input or crystal input

● SPI signals

#	Pin Name	Status/Value at reset	I/O	Active Level	Function
16	SPIDIN	Input	I	---	SPI SLAVE Data input
17	SPIDOUT	Input	B2	---	SPI SLAVE Data output
18	SPIXCS	Input	I	Low	SPI SLAVE Chip Select
19	SPICLK	Input	I	---	SPI SLAVE Clock

● UART signals

#	Pin Name	Status/Value at reset	I/O	Active Level	Function
21	UART_TXD	Output High	O ₂	---	UART TXD output
22	UART_RXD	Input	I _{pd}	---	UART RXD input

● I2C signals

#	Pin Name	Status/Value at reset	I/O	Active Level	Function
25	I2C_SCL	Input	B2PU	---	I2C_SCL monitor pin. Please use this pin open.
24	I2C_SDA	Input	B2PU	---	I2C_SDA monitor pin. Please use this pin open.

● GPIO signals

#	Pin Name	Status/Value at reset	I/O	Active Level	Function
27	GPIO0 /RF_ACTIVE	Output Low	B2	---	GPIO inout/RF_ACTIVE output (default: RF_ACTIVE)
28	GPIO1 /WAKEUP	Input	B2	---	GPIO inout/WAKEUP input (default: WAKEUP)
29	GPIO2 /IRQ	Output High	B2	---	GPIO inout/IRQ output (default: IRQ)
30	GPIO3 /PS_CONTROL	Output Low	B2	---	GPIO inout/Control signal for external Switch (default: PS_CONTROL)

● Miscellaneous signals

#	Pin Name	Status/Value at reset	I/O	Active Level	Function
33	RESETB	Input	I	Low	Reset input (Low = Reset)
14	EFUSE	---	---	---	E-Fuse writing voltage supply(Fixed to Low)
32	TMODE	Input	I	---	TESTMODE input (Fixed to Low)

● Regulator signal

#	Pin Name	Status/Value at reset	I/O	Active Level	Function
9	VDDCORE	---	---	---	Internally generated power supply. (Note)Don't short this pin.
13	REGC	1.2V 出力	---	---	Pin for de-coupling capacitor, require 10uF capacitor.

● Power supply and Ground

#	Pin Name	Status/Value at reset	I/O	Active Level	Function
10	VDDBAT	---	---	---	Power supply 1.8 to 3.6V, require 10uF capacitor.
8	GND	---	---	---	GND
15	GND	---	---	---	GND
20	GND	---	---	---	GND
23	GND	---	---	---	GND
26	GND	---	---	---	GND
31	GND	---	---	---	GND

●ANT_GND signals

#	Pin Name	Status/Value at reset	I/O	Active Level	Function
1,3-4 37 39-52	ANT_GND	---	---	---	Antenna GND pins. ANT_GND pins has to be connected to board, but not to be connected any components on board. (Note)The pins are connected to GND in the module, but please use this pins open.

●NC signals

#	Pin Name	Status/Value at reset	I/O	Active Level	Function
2,5 36,38	NC	---	---	---	NC pins has to be connected to board, but not to be connected any components on board. Please use this pins open.

●Unused pins

Followings are recommendation for unused pins.

#	Pin Name	Recommendation
2,5,36,38	NC	OPEN(NC pins has to be connected to board, but not to be connected any components on board.)
1,3-4,37 39-52	ANT_GND	Open(ANT_GND pins has to be connected to board, but not to be connected any components on board.)
11	LPCLKBUS	Open
14	EFUSE	Fix to 0V
16	SPIDIN	Fix to High
17	SPIDOUT	Fix to High
18	SPIXCS	Fix to High
19	SPICLK	Fix to High
21	UART_TXD	Open
22	UART_RXD	Fix to Low (See section for operating mode)
24	SDA	Open (Pull-up resistor in the module)
25	SCL	Open (Pull-up resistor in the module)
27	GPIO0/RF_ACTIVE	Open
28	GPIO1/WAKEUP	Fix to High or Low See section for operating mode
29	GPIO2/IRQ	Open
30	GPIO3/PS_CONTROL	Open
34	A0	Open
35	A1	Open

Remarks

If input pins are left open with High Impedance status, significant current consumption might be observed. All input pins have to be fixed high or low level to avoid such current consumption.

■ Electrical Characteristics

● Absolute Maximum Rating

Item	Symbol	Condition	Rating	Unit
Power supply (*1)	V _{DDBAT}	Ta = -20 to +70 deg.C GND=0V	-0.3 to +4.6	V
Digital input voltage (*2)	V _{DIN}		-0.3 to V _{DD} +0.3	V
Digital output voltage (*3)	V _{DO}		-0.3 to V _{DD} +0.3	V
Analog HV IO voltage (*4)	V _{AH}		-0.3 to V _{DD} +0.3	V
Digital IO load current (*2)(*3)	I _{DO}		-10 to +10	mA
Analog IO current (*4)	I _A		-2 to +2	mA
Power Dissipation	P _D		T.B.D.	W
Storage temperature	T _{stg}	-	-40 to +125	deg.C

(*1) V_{DDBAT}pin

(*2) IO pins with I, I_{PD}, B₂ symbol in pin definition

(*3) IO pins with O₂, B₂ symbol in pin definition

(*4) IO pins with I_{AH}, I_{SH}, X_{SH}, symbol in pin definition

● Recommended Operating Conditions

Item	Symbol	Condition	Min	Typ	Max	Unit
Power Supply	V _{DD}	V _{DDBAT} pin	1.8	3.3	3.6	V
Ambient Temperature	T _a	-	-20	+25	+70	°C
Rising time digital input pins	t _{IR1}	Digital input/inout pins	-	-	20	Ns
Falling time digital input pins	t _{IF1}	Digital input/inout pins	-	-	20	Ns
Load capacitance digital	C _{DL}	Digital output/inout pins	-	-	20	pF
Low Power Clock (32.768 kHz) crystal oscillator frequency	F _{LPCK1}	LPCLKIN pin, LPCLKBUS pin (*1)	-250 ppm	32.768	+250 ppm	kHz
Low Power Clock Input Duty Ratio	D _{LPCK1}	External input from LPCLKIN, LPCLKBUS pin left OPEN	30	50	70	%
RF Channel frequency (*2)	F _{RF}	OUT_MOD pin	2402	-	2480	MHz
RF input level	P _{RFIN}	-	-70	-	-10	dBm

(*1) The crystal should be used the one that meet the specification include peripheral circuit.

(*2) Frequency range $F = 2402 + 2 \times k$ [MHz] here k=0, 1,2,...,39.

● Current consumption

(Ta = 25 deg.C)

Item	Symbol	Condition	Min	Typ	Max	Unit
Current Consumption	I _{DD1}	Deep Sleep state (External Low Power Clock)	–	0.8	–	uA
	I _{DD2}	Idle state	–	3	–	mA
	I _{DD3}	RF RX state	–	9	–	mA
	I _{DD4}	RF TX state (-6dBm)	–	9	–	mA
		RF TX state (0dBm)	–	10.9	–	mA

(note) Condition: Ta=25deg.C, V_{DDBAT}=3.3V

● DC characteristics

(Ta = -20 to +70 deg.C)

Item	Symbol	Condition	Min	Typ	Max	Unit
H level Voltage Input	V _{IH1}	(*1) (*2) (*5)	V _{DD} X0.7	–	V _{DD}	V
L level Voltage input	V _{IL1}	(*1) (*2) (*5)	0	–	V _{DD} X0.3	V
LPCLKIN pin H level Voltage Input	V _{IH2}	(*3)	1	–	V _{DD}	V
LPCLKIN pin L level Voltage input	V _{IL2}	(*3)	0	–	0.3	V
H level Voltage Output	V _{OH}	I _{OH} = -2mA (*4) (*5)	V _{DD} × 0.75	–	V _{DD}	V
L level Voltage Output	V _{OL}	I _{OL} = 2mA (*4) (*5)	0	–	V _{DD} × 0.25	V
Input pin capacitance	C _{IN}	F=1MHz (*1) (*2) (*4) (*5)	–	8	–	pF

(*1) IO pins with I symbol in pin definition

(*2) IO pins with IPD symbol in pin definition

(*3) IO pins with I_{SH} symbol in pin definition

(*4) IO pins with O₂ symbol in pin definition

(*5) IO pins with B₂ symbol in pin definition

●RF Characteristics

(Ta = -20 to +70 deg.C)

Item	Symbol	Condition	Min	Typ	Max	Unit
TX						
TX power	P _{OUT1}		-3	0	3	dBm
	P _{OUT2}		-	-18	-	dBm
Centre Frequency tolerance	F _{CERR}	Master Clock tolerance < 40 ppm	-40	-	40	ppm
Modulation data rate	D _{RATE}	-	-	1	-	Mbps
Modulation index	F _{IDX}	-	0.45	0.50	0.55	-
Bandwidth-bit rate products BT	BT	GFSK	-	0.5	-	-
RX						
Receiver Sensitivity	P _{SENS}	PER =30.8% (*1)	-	-85	-70	dBm
Maximum input level(*2)	P _{RXMAX}	PER=30.8% (*1)	-	-	-10	dBm
RSSI detection range	P _{RSSIMAX}	Upper	-50	-	-	dBm
	P _{RSSIMIN}	Lower	-	-	-80	dBm

(*1) PER=30.8% is corresponding to BER=0.1%

(*2) Condition: Ta = 25°C、VDDHV = 3.3V

●SPI interface


(Ta = -20~+70°C)


Item	Symbol	Condition	Min	Typ	Max	Unit	
SPICLK Clock Frequency	F _{SCLK}	Load capacitance CL=20pF	16.384	32.768	1625	kHz	
SPIXCS input setup time	T _{CESU}		1/F _{sclk}	-	-	-	ms
SPIXCS input hold time	T _{CEH}		1/F _{sclk}	-	-	-	ms
SPICLK high pluse width	T _{WCKH}		250	-	-	-	ns
SPICLK low pluse width	T _{WCKL}		250	-	-	-	ns
SPIDIN input setup time	T _{DISU}		5	-	-	-	ns
SPIDIN input hold time	T _{DIH}		250	-	-	-	ns
SPICLK output delay time	T _{CKOD}		-	-	250	-	ns
SPIDOUT output hold time	T _{DOH}		5	-	-	-	ns
SPIXCS output enable delay time	T _{CEEN}		0	-	300	-	ns
SPIXCS output disable delay time	T _{CEDIS}		150	-	-	-	ns

Remarks: All timing specification is defined at VDDIO x 20% and VDDIO x 80%

SPIXCS input setup/hold time have to be at least 1cycle of SPICLK clock frequency

Measurement point



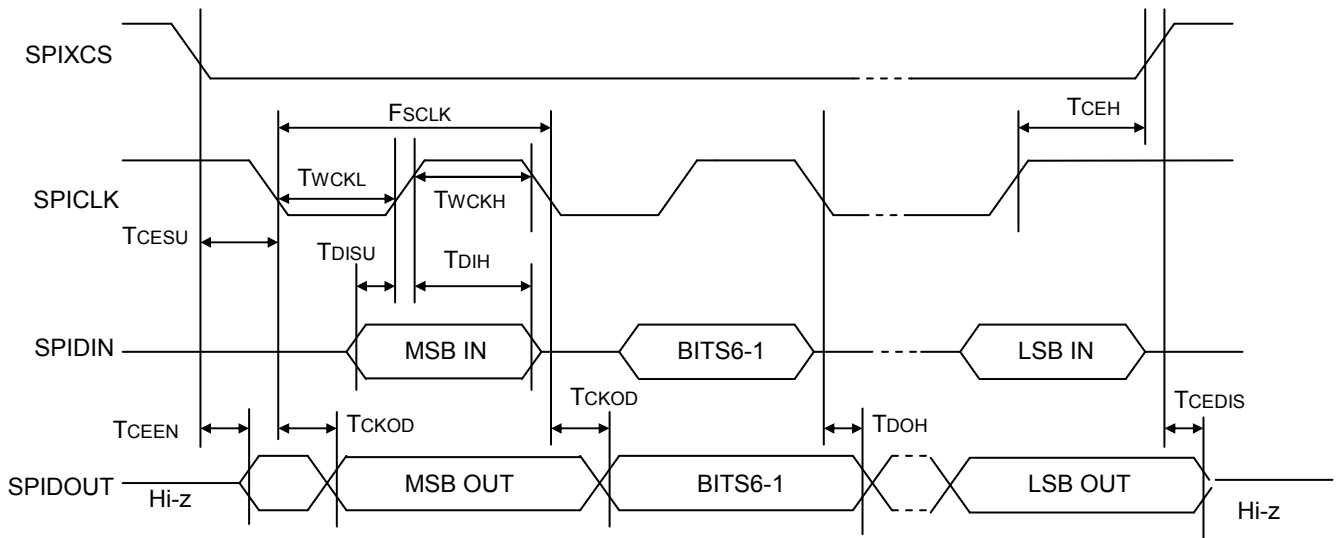


(*) SPIDOUT becomes Hi-Z input when SPIXCS is High. So please insert the pull-up or pull-down resistor .

●UART interface

($T_a = -20$ to $+70$ deg.C)


Item	Symbol	Condition	Min	Typ	Max	Unit
Baud Rate	FBAUD	Load capacitance CL=20pF	-	57600	-	bps(Hz)

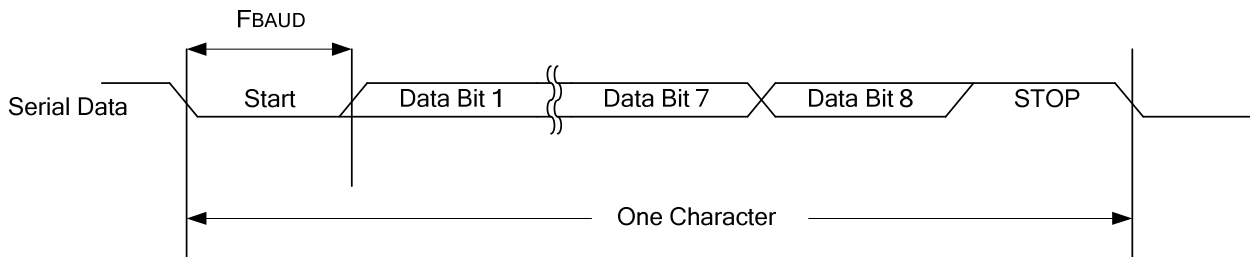

● Reset operation

(Ta = -20 to +70 deg.C)

Item	Symbol	Condition	Min	Typ	Max	Unit
RESETB propagation delay time (Power on)	TRDL	Start supplying power (VDDBAT)	20	-	-	ms
Reset pulse width	TRPLS	RESETB pin	1	-	-	us

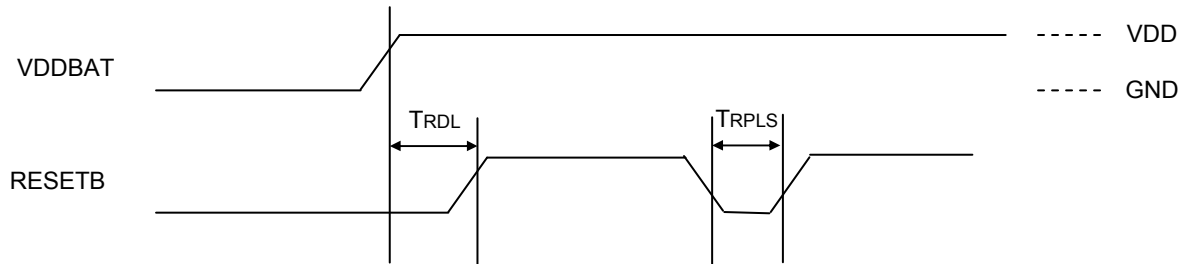

Power on reset function

Reset function from RESETB pin


It is possible to reset internal circuit by asserting RESETB after power supply is on.

It is possible to reset internal circuit by same way even if it is not power sequence. Internal circuit will move to normal state after oscillation circuit become stable by clock stabilizing circuit after reset function.

● Power on

(Ta = -20 to +70 deg.C)

Item	Symbol	Condition	Min	Typ	Max	Unit
VDD pin rising time	TPWON	While power on VDD pins (VDDBAT)	0.2	1	5	ms
Power off Time	TPWOFF	VDD pins(VDDBAT)	10	-	-	ms
Initial power level	VBOOT	VDD pins(VDDBAT)	-	-	0.3	V

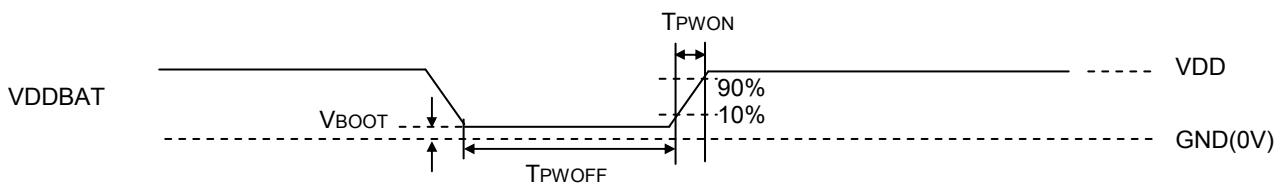

■ Operating mode

Following 3 operating modes are available to use

- BACI Mode: Application mode using SPI-SLAVE interface
- HCI Mode: HCI mode (Bluetooth LE standard compliant) using UART interface.
- RAM Mode: Function extension mode downloading user program to internal memory

■ Operating mode configuration


Configuration of operating mode will be done by pin status shown in table below. The symbol "X" is don't care, it has to be used as normal function. When configure operating mode, reset has to be issued.
RAM mode and Debug mode is distinguished by configuration parameter.


Operating mode	Pin confitions
	UART_RXD
BLI Mode	Low
HCI Mode(*1)	High
RAM Mode	X

(*1)Please fix wakeup pin to low level when using in HCI mode.

Please refer to ML7105C-001 data sheet and associated documentation for more detail.


■ Module dimension

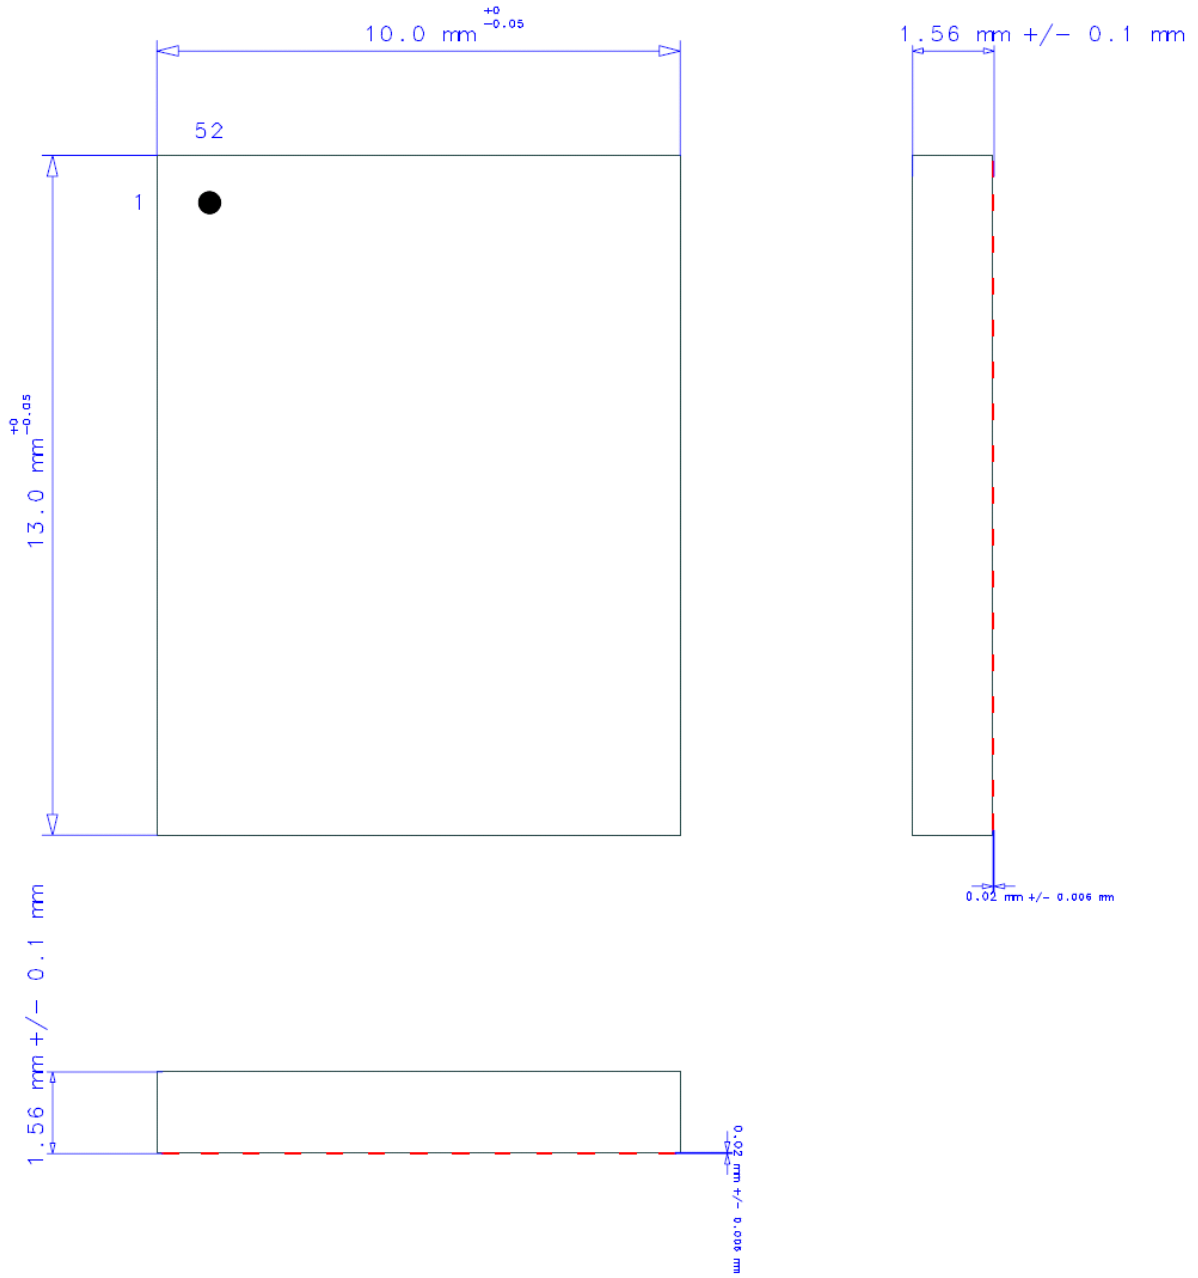

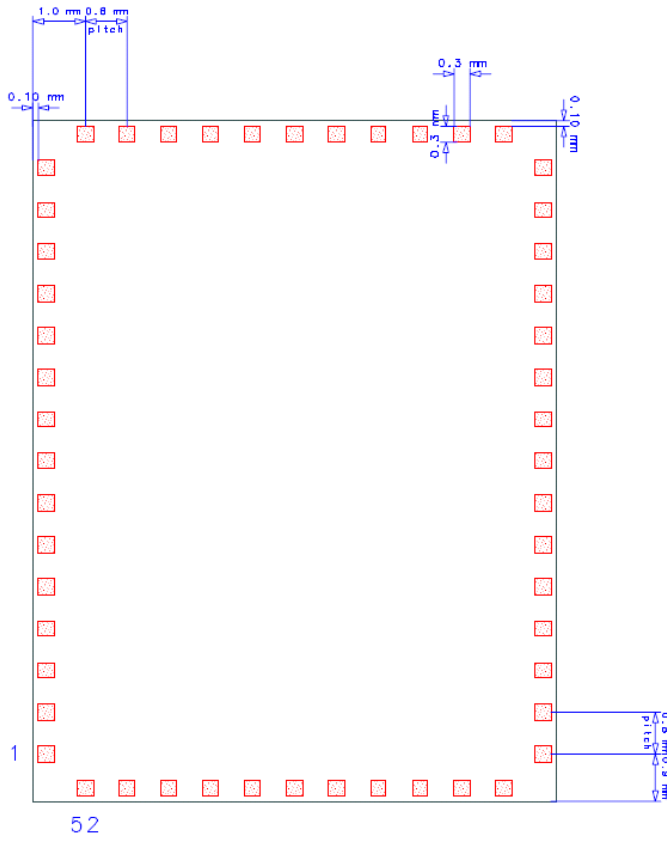


■ Appendix

● PCB Land Pattern

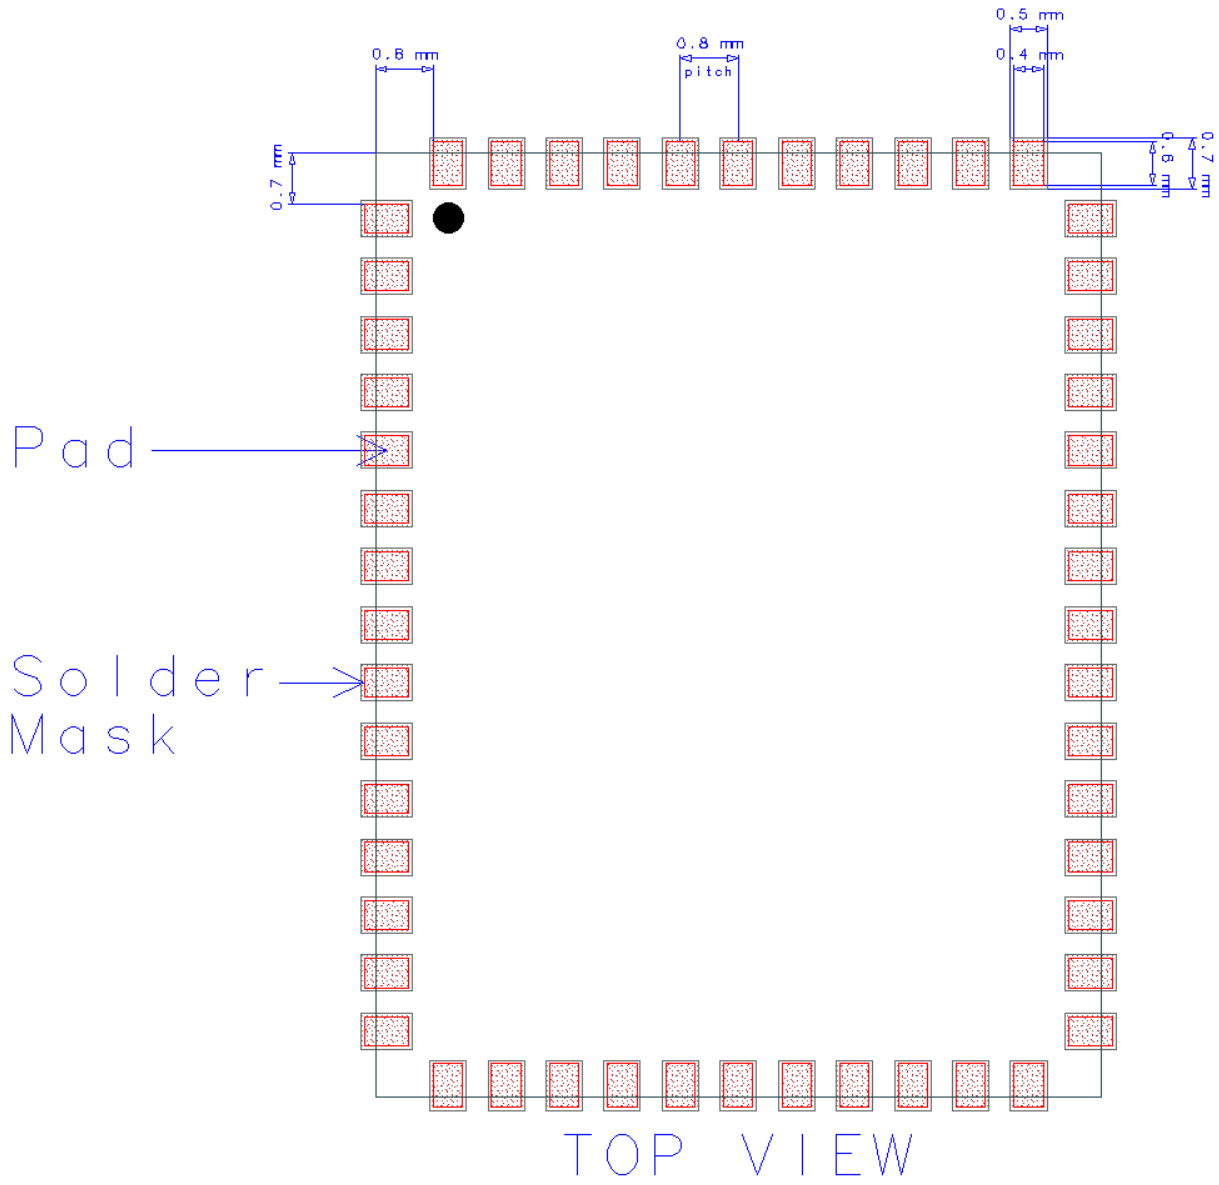

● Metal Keep-Out Area

Metal exclusion zone to edge of board (no metal on any layer except mechanical LGA pads)

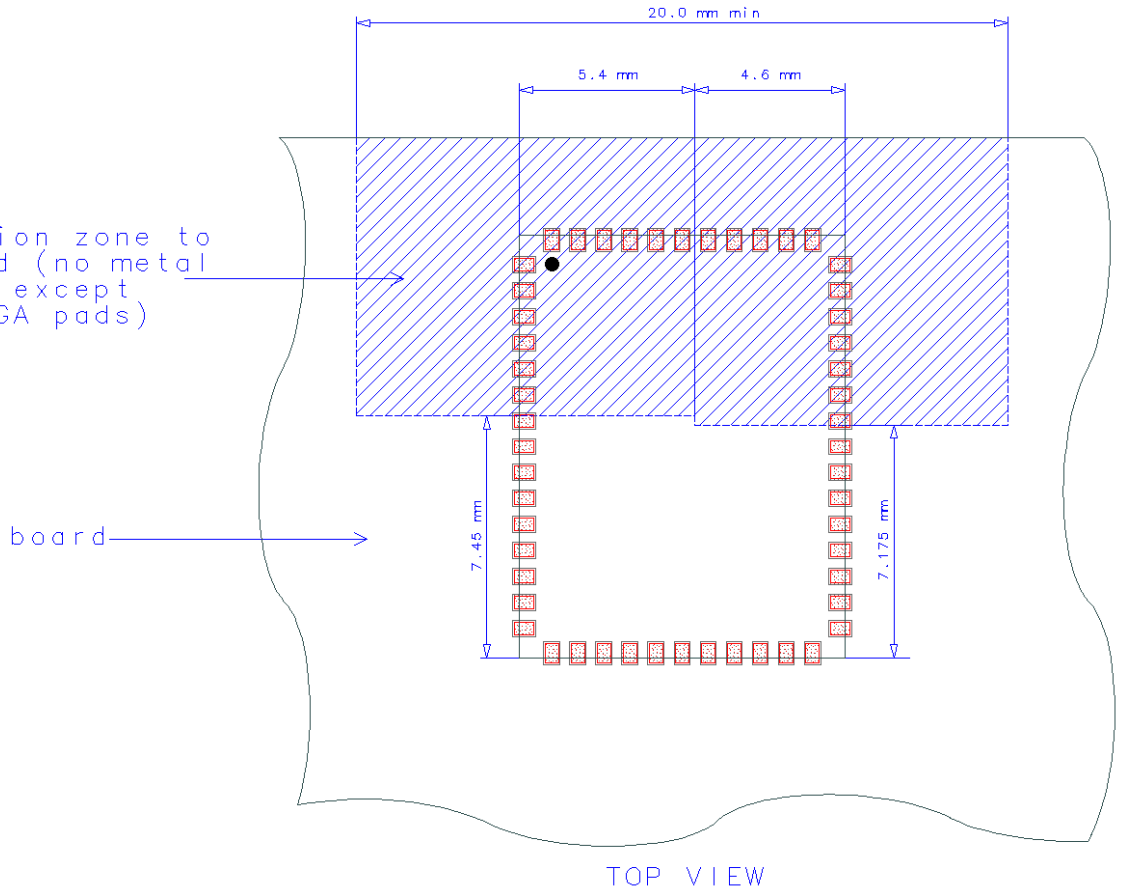

■ Revision History

Document No.	Date	Page		Description
		Previous Edition	Current Edition	
PEDK71050-02-01	Jun,4,2013	-	-	Preliminary edition 1
PEDK71050-02-02	Aug,8,2013	1,9	1,9	Added the specification of current consumption.

NOTES

No copying or reproduction of this document, in part or in whole, is permitted without the consent of LAPIS Semiconductor Co., Ltd.

The content specified herein is subject to change for improvement without notice.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, LAPIS Semiconductor shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. LAPIS Semiconductor does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by LAPIS Semiconductor and other parties. LAPIS Semiconductor shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While LAPIS Semiconductor always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. LAPIS Semiconductor shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). LAPIS Semiconductor shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.

Copyright 2013 LAPIS Semiconductor Co., Ltd.