

Weigh Indicator / Controller



FEATURES

- High speed process control, 300 samples per second
- Batch, blend, and mix systems
- Up to 30 recipes with 24 activities each
- Excellent connectivity and operator interface
- Flow measurement capability
- Easy setup via front panel keypad or remote PC

OPTIONAL FEATURE

- Customized software

DESCRIPTION

The TAD 3 Weight Processor monitors and controls strain gage load-cell-based weighing systems. It has an A-D resolution of nearly 14 million counts and easily interfaces with other PC and PLC controllers via two communication ports. It can also be used with an external alphanumeric or graphical display, in addition to its integral backlit graphic liquid crystal display. High accuracy and very fast transmission rates make the TAD 3 ideal for advanced process control applications.

The TAD 3 recipe batching version allows storage of up to 30 recipes with up to 24 activities per recipe. Batching is carried out over separate, digital I/O units.


The batching version of the TAD 3 makes it possible to perform batching of up to six components in coarse and fine feeding phases. Other process functions like stirring, heating, dumping, etc. also can be controlled with the batching version.

A menu program leads the operator through all phases of the process. He can enter alphanumeric information in his own language on the graphic display. Another way to perform setup and calibration is to use the deltaCOM program on a PC (please see separate data sheet). The basic version of deltaCOM is included in the TAD 3 processor version.

APPLICATIONS

- Batch/blend/mix systems
- Multiple recipe controller
- Quality-critical process weighing
- Custom weighing applications

OUTLINE DIMENSIONS

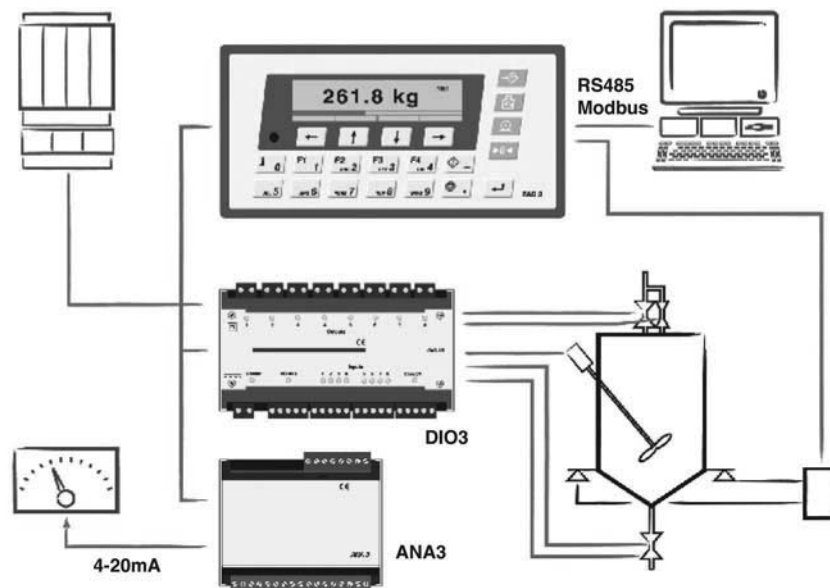

SPECIFICATIONS

PERFORMANCE

Resolution	13 800 000 counts
Conversion speed	0.5 to 300Hz, ratiometrically integrating converter
Update rate	0.5 to 60Hz
Display divisions	100000, legal 10000
Minimum division	0.3 μ V, legal 0.5 μ V
Accuracy	0.002% of full scale
Full scale range	\pm 3.3mV/V
Non-linearity	<0.002% of used range
Excitation voltage	9.7VDC to 5.5VDC with 1 to 8 of 350 ohm transducers
Number of 350 ohm l.c.	8 pcs (Total load >45 ohms)
Filter	0.04 to 20 seconds digital average. Adaptive filter.
Offset drift	< \pm 0.01 μ V/ $^{\circ}$ C
Gain drift	< \pm 0.00015% of actual value/ $^{\circ}$ C
Calibration methods	Data sheet, Table, Dead weight, Shunt

ENVIRONMENTAL

Operating temperature	-10 $^{\circ}$ C to +50 $^{\circ}$ C
Storage temperature	-25 $^{\circ}$ C to +85 $^{\circ}$ C
Relative humidity	95%
IP level	IP 65 at the front end by panel mounting

FRONT PANEL

Display type and size	Graphic LCD with backlight, 248 x 60 pixels (94 x 20mm)
Keyboard	Total of 21 buttons. Digit and character entry, -sign, decimal point, ENTER, 4 function buttons, Tare, Gross/Net, Print, Zero

POWER SUPPLY

Voltage	24VDC \pm 20%
Power consumption	8W

DIGITAL INPUTS

Inputs	2 pcs
Type and load	24VDC, 6mA

RELAY OUTPUTS

Number	2 pcs (each with 1 switching group)
Load	Max 1A, 30V AC or DC

COMMUNICATION INTERFACE, COM 1

Interface	RS-485/RS422 (two-wires or four-wires) or RS-232
Protocol	MODBUS RTU or ASCII
Baud rate	Up to 115.2kbaud
Function	For control communication (MODBUS RTU), external display/printer (ASCII) or fieldbus communication (via GATE 3S).

COMMUNICATION INTERFACE, COM 2

Interface	RS-485/RS422 (two-wires or four-wires)
Protocol	MODBUS RTU or ASCII
Baud rate	Up to 460.8kbaud
Function	For control communication (MODBUS RTU), optional I/O units, external display/printer (ASCII) or fieldbus communication (via GATE 3S).

MECHANICAL DATA

Dimensions	100 x 200 x 123mm (H x W x D) Depth behind panel 135mm (add 50mm if D-sub connector is used for RS-232)
Standard mounting	Panel mounting (max. 10mm thick panel). Cut-out 92 x 186mm, r<5mm.
Connector type	Plug-in screw terminals, D-sub (RS-232)
Certifications	CE, Welmec TC to OIML 10000e

HARDWARE OPTIONS

Separate units, connected to a serial communication port of TAD 3.

Analog Output unit ANA 3

Two units can be connected to serial communication port COM 2 of TAD 3.
See separate data sheet.

Digital I/O unit DIO 3 R

Two units (up to four in special applications) with each 8 in-/outputs, can be connected to serial communication port COM 2 of TAD 3.

See separate data sheet.

Gateway GATE 3 / GATE 3S

For fieldbus communication. One unit can be connected to one of the serial communication ports of TAD 3.
See separate data sheet.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.