
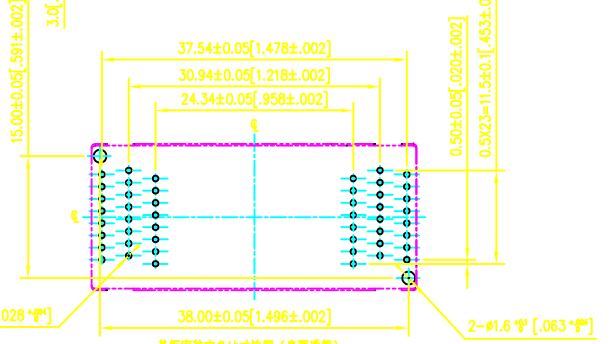

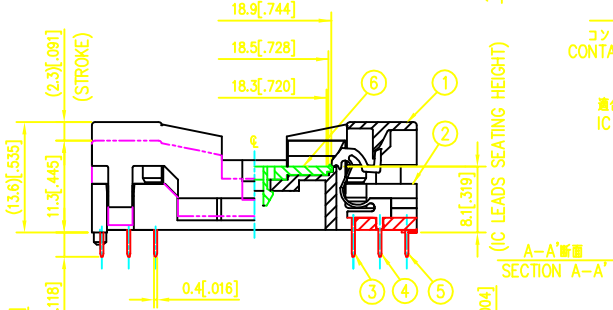
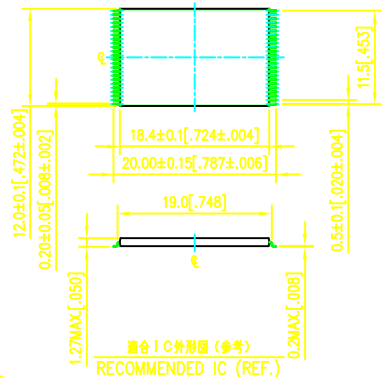



REV	DATE	ECO NO	BY
—	10.04.93		A.K
	10.06.93	■ DCN93054	A.K
A	Oct 19 1998	DCN98263	K.T
B	Jun 14 1999	DCN99017	M.I

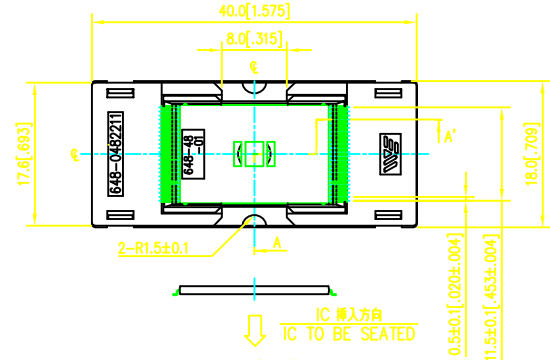

**Performance**

1. Insulation Resistance : 1000 MΩ min. at 500V.D.C
2. Dielectric Withstanding Voltage : 600 V.A.C (RMS)
3. Contact Resistance : 30 mΩ max. at 20mV max.
4. Temperature Range : -40°C ~ +150°C

**性能**

1. 絶縁抵抗 : DC500Vで測定し、1000Ω以上のこと。
2. 耐電圧 : AC600Vを1分間印加して異常の無いこと。
3. 接触抵抗 : 開回路電圧20mV以下にて測定し、30mΩ以下のこと。
4. 使用温度 : -40°C ~ +150°C

⑥	ADAPTOR	PES	1	COLOR : BLACK
⑤	CONTACT-C	Be Cu	16	PLATING : Au
④	CONTACT-B	Be Cu	16	PLATING : Au
③	CONTACT-A	Be Cu	16	PLATING : Au
②	BASE (C)-48P	PEI	1	COLOR : BLACK
①	COVER-48P	PES	1	COLOR : BLACK

P.N.O	PART DESCRIPTION	MATERIAL	QTY	NOTE
	GENERAL TOLERANCES			
	±0.3 [±0.012]			
UNIT	SCALE	ANGLE		
mm [in.]	2X	3rd.		
DRAWN	/ /	/ /		
ENGINEER	/ /	/ /		
CHECKED	/ /	/ /		
APPROVED	/ /	/ /		

**WELLS-CTI**  
A subsidiary of PCD Inc.  
YOKOHAMA  
KANAGAWA  
JAPAN  
ウエルズ・シーティアイ株式会社

PART NAME  
**TSOP-48P  
LIVE BUG SOCKET**

PART NUMBER	REV
648-0482211-A01	B
DWG NUMBER	SHEET
648MSA031	1/1

THIS DOCUMENT CONTAINS PROPRIETARY DESIGN SPECIFICATIONS, DATA INFORMATION AND TECHNICAL MATERIAL THAT ARE THE SOLE PROPERTY OF WELLS-CTI. THIS INFORMATION IS TO BE HELD AND TREATED BY ITS RECIPIENT ON A CONFIDENTIAL BASIS AND IS NOT TO BE SHOWN OR DISCLOSED TO THIRD PARTY WITHOUT THE WRITTEN CONSENT OF WELLS-CTI. THIS DATA DOES NOT CONVEY MANUFACTURING RIGHTS TO ANY ITEMS SHOW.

この図面に含まれる技術情報の一部は WELLS-CTI 単独の所有権を有する。従って情報非開示の原則に基づき WELLS-CTI 社による同意無しにこの図面を第三者に開示すること及び複製目的に使用することを禁ずる。

基板実装穴めけ寸法図 (後面透視)  
FOOTPRINT AS VIEWED LOOKING DOWN FROM TOP OF SOCKET