


MULTILAYER CERAMIC CAPACITORS RADIAL TAPING FOR AUTOMATIC INSERTION

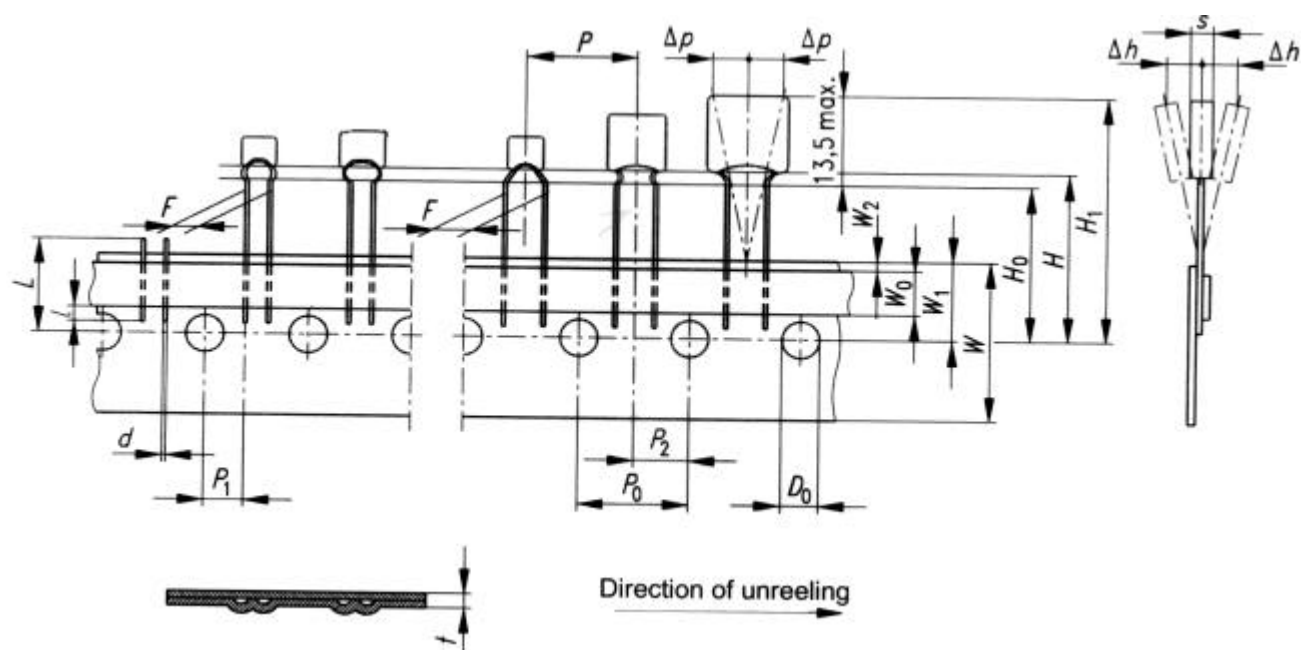

Dimensions(mm)	Lead spacing		Tolerance	Comments
	2,5mm	5,0mm		
B	11,0	11,0	max	
S	2,5	2,5	max	
D	0,55	0,55	±0,05	
P	12,7	12,7	±1,0	
P ₀	12,7	12,7	±0,2	±1mm/20 hole spaces
P ₁	5,1	0,55	±0,7	
P ₂	6,35	6,35	±1,3	
F	2,5	5,0	±0,6/-0,1	
h	0	0	±2,0	Measured at top of component body
p	0	0	±1,3	
W	18,0	18,0	±0,5	
W ₀	5,5	5,5	Min	Peel force ≥ 5 N
W ₁	9,0	9,0	±0,5	
W ₂	1,0	1,0	-0,5	
H	18,0	18,0	±2,0/-0	
H ₀	16,0	16,0	±0,5	
H ₁	32,2	32,2	Max	
D ₀	4,0	4,0	±0,2	
T	0,7	0,7	+0,2	
L	11,0	11,0	max	
I	1,0	1,0	max	