

## Aluminum Single Point Load Cell



### FEATURES

- Capacities 0.5 - 5kg for 350 ohm
- Capacities 5 - 20kg for 1000 ohm
- Aluminum construction
- Single point 200 x 200mm platform
- IP66 protection

### DESCRIPTION

Model 1002 is a very small, low capacity, aluminum single point load cell, equally suitable for simple weighing scales or for industrial measurement and medical applications.

The Model 1002 has the advantage of very small size. It is therefore both versatile and easy to use in a wide variety of industrial measurement applications.


Optional 1000 ohm strain gages are particularly suitable for connection to battery-powered equipment (designated Model 1002-K).

Typical applications include packing machines, filling machines, weaving machines, industrial process control, and low-force medical applications, as well as small-platform weighing.

### APPLICATIONS

- Small scales
- Grocery scales


### OUTLINE DIMENSIONS in millimeters

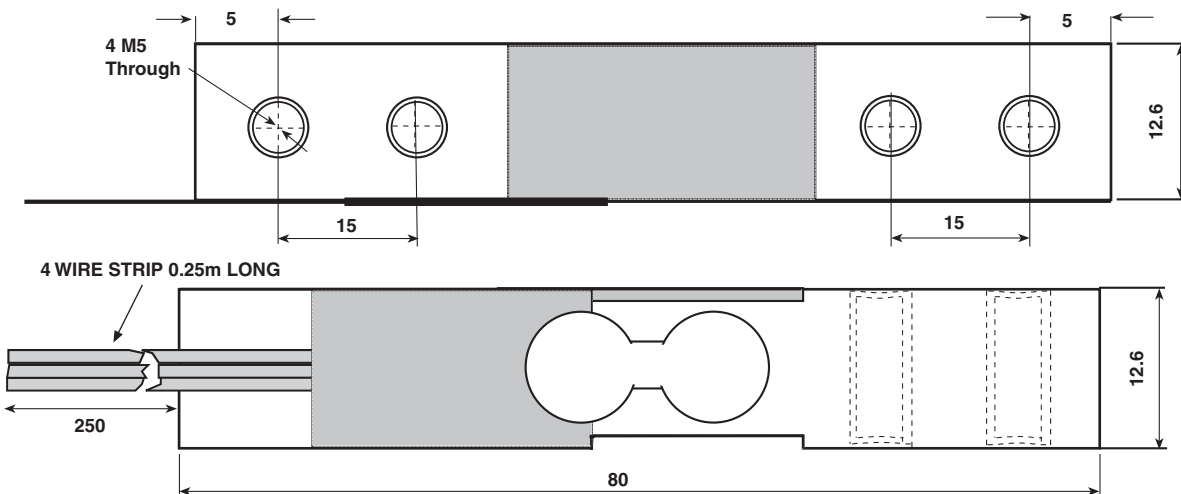

## SPECIFICATIONS

PARAMETER	VALUE		UNIT
	1002	1002-K	
Model	1002	1002-K	
Accuracy class	Non-Approved		
Maximum no. of intervals (n)	1000		
Rated capacity-R.C. ( $E_{max}$ )	0.5, 1, 2, 3, 5	5, 8, 15, 20	kg
Rated output-R.O.	0.5	1.5	mV/V
Rated output tolerance	10		±% mV/V
Zero balance	0.4	0.2	±mV/V
Zero Return, 30 min.	0.050		±% of applied load
Total Error	0.1		±% of rated output
Temperature effect on zero	N/A		±% of rated output/°C
Temperature effect on output	N/A		±% of load/°C
Eccentric loading error	0.16		±% of rated load/cm
Temperature range, compensated	-10 to +40		°C
Temperature range, safe	-20 to +70		°C
Maximum safe central overload	150		% of R.C.
Ultimate central overload	300		% of R.C.
Excitation, recommended	5		Vdc or Vac rms
Excitation, maximum	15		Vdc or Vac rms
Input impedance	350±50	1000±50	Ohms
Output impedance	350±50	1000±50	Ohms
Insulation resistance	>2000		Mega-Ohms
Cable length	0.25		m
Cable type	4 wire, PVC		Standard
Construction	Aluminum		
Environmental protection	IP66		
Platform size (max)	200 x 200		mm
Recommended torque	2		N*m

**Wiring Schematic Diagram**  
(Balanced bridge configuration)



## VISHAY TRANSDUCERS (VT) SALES OFFICES

**VT Americas**  
City of Industry, CA  
PH: +1-626-858-8899  
FAX: +1-626-332-3418  
vt.us@vishaymg.com

**VT Netherlands**  
Breda  
PH: +31-76-548-0700  
FAX: +31-76-541-2854  
vt.nl@vishaymg.com

**VMG UK**  
Basingstoke  
PH: +44-125-646-2131  
FAX: +44-125-647-1441  
vt.uk@vishaymg.com

**VMG Israel**  
Netanya  
PH: +972-9-863-8888  
FAX: +972-9-863-8800  
vt.il@vishaymg.com

**VMG Germany**  
Heilbronn  
PH: +49-7131-3901-260  
FAX: +49-7131-3901-2666  
vt.de@vishaymg.com

**VT China**  
Tianjin  
PH: +86-22-2835-3503  
FAX: +86-22-2835-7261  
vt.prc@vishaymg.com

**VMG France**  
Chartres  
PH: +33-2-37-33-31-20  
FAX: +33-2-37-33-31-29  
vt.fr@vishaymg.com

**VT Taiwan\***  
Taipei  
PH: +886-2-2696-0168  
FAX: +886-2-2696-4965  
vt.roc@vishaymg.com  
\*Asia except China