

Single Point Stainless Steel Load Cell



FEATURES

- Capacity range: 10 to 150kg
- Stainless steel construction
- Single point 400 x 400mm platform
- Sealed to IP66
- Compact size: only 40mm high
- OIML approved to C3 (20 - 100kg)
- Choice of mounting threads: 1/4-20 UNC or M6 x 12

OPTIONAL FEATURES

- EEx ia IIC T4 - ATEX hazardous area approval
- Grounded version includes shield wire in load cell cable

DESCRIPTION

Model 1142 is a stainless steel single point load cell suitable for direct mounting with platform, bench, counting, and a wide range of other scale applications. Small physical size, combined with high accuracy and low cost, makes 1142 load cells the perfect choice for new or retrofit scale construction.

A humidity-resistant protective coating assures stable operation in damp environments over the entire compensated range and conforms to IP66 (IEC 60529).

Also available is an ATEX 2G EEx ia IIC T4 approved version for hazardous areas.


The six-wire cable includes two sense wires that compensate for changes in lead resistance due to temperature changes and cable extension.

Model 1142 options offer a choice of boltthreads, 1/4-20 UNC or M6 x 12, and a grounded version that includes a "shield" wire in the load cell cable.

APPLICATIONS

- Platform scales
- Bench scales
- Counting scales
- Grocery scales

OUTLINE DIMENSIONS in millimeters

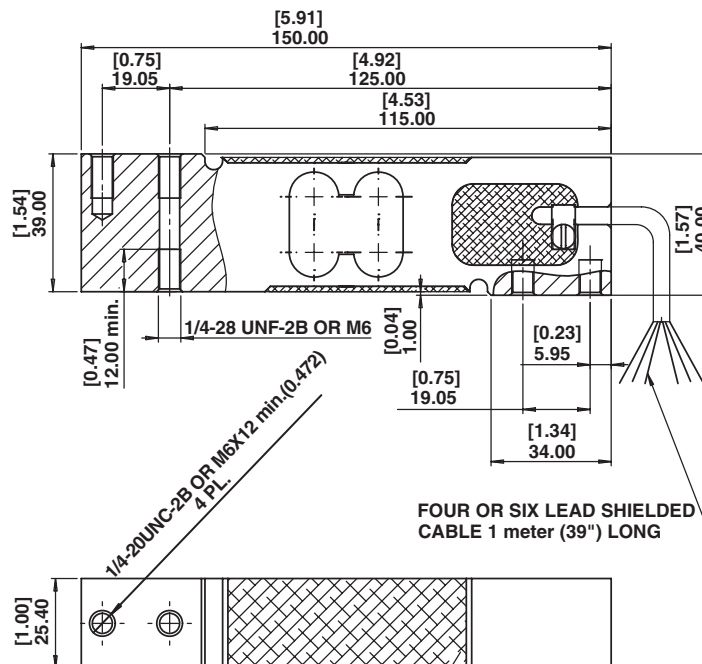

All DIMENSIONS IN mm [inches].




SPECIFICATIONS

| PARAMETER | VALUE | | UNIT |
|-----------------------------------|-------------------------------------|--------|-----------------------|
| Rated capacity-R.C. (E_{max}) | 10, 15, 20, 30, 50, 75, 100, 150** | | kg |
| OIML Accuracy class | Non-Approved | C3* | |
| Maximum no. of intervals (n) | 1000 | 3000 | |
| $Y = E_{max}/V_{min}$ | 4000 | 15000 | Maximum available |
| Rated output-R.O. | 2.0 | | mV/V |
| Rated output tolerance | 0.2 | | ±mV/V |
| Zero balance | 0.2 | | +mV/V |
| Zero Return, 30 min. | 0.0500 | 0.0167 | ±% of applied load |
| Total Error | 0.0300 | 0.0200 | ±% of rated output |
| Temperature effect on zero | 0.0070 | 0.0023 | ±% of rated output/°C |
| Temperature effect on output | 0.0030 | 0.0010 | ±% of applied load/°C |
| Eccentric loading error | 0.0074 | 0.0049 | ±% of rated load/cm |
| Temperature range, compensated | -10 to +40 | | °C |
| Temperature range, safe | -20 to +70 | | °C |
| Maximum safe central overload | 150 | | % of R.C. |
| Ultimate central overload | 300 | | % of R.C. |
| Excitation, recommended | 10 | | Vdc or Vac rms |
| Excitation, maximum | 15 | | Vdc or Vac rms |
| Input impedance | 385±10 | | Ohms |
| Output impedance | 351±5 | | Ohms |
| Insulation resistance | >2000 | | Mega-Ohms |
| Cable length | 1 | | m |
| Cable type | 6 wire, PVC, single floating screen | | Standard |
| Construction | Stainless steel | | |
| Environmental protection | IP66 | | |
| Platform size (max) | 400 x 400 | | mm |
| Recommended torque | Up to 30kg: 7.0 50kg & up: 10.0 | | N*m |

* 50% utilization

** 10, 15 & 150 are not approved

Wiring Schematic Diagram
(Balanced bridge temperature compensation)



VISHAY TRANSDUCERS (VT) SALES OFFICES

VT Americas
City of Industry, CA
PH: +1-626-858-8899
FAX: +1-626-332-3418
vt.us@vishaymg.com

VT Netherlands
Breda
PH: +31-76-548-0700
FAX: +31-76-541-2854
vt.nl@vishaymg.com

VMG UK
Basingstoke
PH: +44-125-646-2131
FAX: +44-125-647-1441
vt.uk@vishaymg.com

VMG Israel
Netanya
PH: +972-9-863-8888
FAX: +972-9-863-8800
vt.il@vishaymg.com

VMG Germany
Heilbronn
PH: +49-7131-3901-260
FAX: +49-7131-3901-2666
vt.de@vishaymg.com

VT China
Tianjin
PH: +86-22-2835-3503
FAX: +86-22-2835-7261
vt.prc@vishaymg.com

VMG France
Chartres
PH: +33-2-37-33-31-20
FAX: +33-2-37-33-31-29
vt.fr@vishaymg.com

VT Taiwan*
Taipei
PH: +886-2-2696-0168
FAX: +886-2-2696-4965
vt.roc@vishaymg.com
*Asia except China