

Double Ended Beam Load Cell



FEATURES

- Capacities: 5K to 250Klb
- Low profile construction
- Nickel plated alloy steel construction
- Certified to OIML R60 3000d, NTEP CoC - 10000d
- Sealing: IP67 (DIN 40.050)

OPTIONAL FEATURE

- FM approved for use in hazardous locations
- Atex versions are available for use in potentially explosive atmospheres

DESCRIPTION

5103 transducers are double ended, center loaded shear beam load cells. The 5103 is constructed of nickel plated alloy steel.

These products are suitable for tank weighing systems, low cost weighbridges and axle weighers.


A reliable sealing is ensured by the proprietary TRANSEAL potting compound and additional mechanical protection of the strain gage area.

A specially designed mounting arrangement is available, providing the ideal solution for vessel / tank weighing.

APPLICATIONS

- Platform scales
- On-board weighing
- Weighbridges
- Silo hopper weighing

OUTLINE DIMENSIONS in millimeters

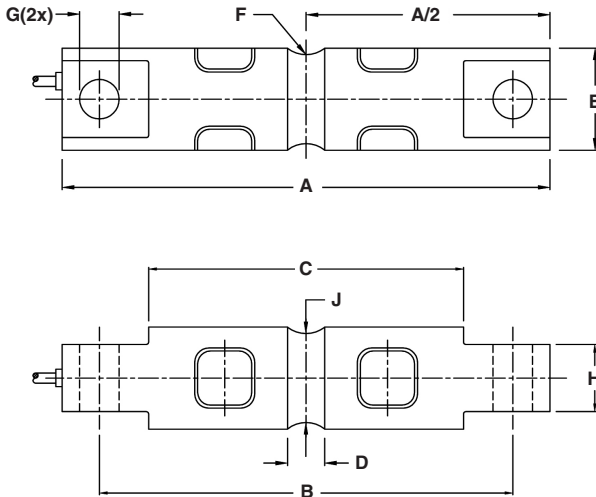

Capacity (lbs)	5K, 10K	20K	30 - 60K	100K	150K	200K, 250K
A	206.2	206.2	260.4	285.8	285.8	408.9
B	174.6	174.6	215.9	241.3	241.3	330.2
C	133.1	133.1	165.1	190.5	190.5	254.0
D	15.7	21.3	25.4	31.8	31.8	33.0
E	43.2	49.5	76.2	88.9	99.1	136.5
F	12.7	12.7	25.4	38.1	38.1	50.8
G	16.7	16.7	26.9	26.9	26.9	39.6
H	28.4	28.4	60.2	63.5	71.1	116.8
J	37.6	37.6	69.3	82.3	92.5	131.4

Note: Dimensions in millimeters

Cable specifications:

Cable length: 10 meters (6 meters for 5 - 20K)

- Excitation + Red
- Excitation - Black
- Output + Green
- Output - White
- Shield Transparent

**SPECIFICATIONS**

PARAMETER	VALUE			UNIT
Standard capacities (E_{max})	2.3, 4.5, 9.1, 13.6, 18.2, 22.7, 27.2, 45.4, 68, 91, 113			ton
Standard capacities (E_{max})	5, 10, 20, 30, 40, 50, 60, 100, 150, 200, 250			Klbs
Accuracy class according to OIML / NTEP	NTEP	Non-Approved	C3	
Maximum no. of verification intervals (n_{ic})	III L 10000	D3	3000	
Minimum verification interval (V_{min})			$E_{max}/10,000$	
Rated output ($=S$)	3.0			mV/V
Rated output tolerance	0.003			\pm mV/V
Zero balance	1.0			\pm % FSO
Combined error	0.0200	0.0300	0.0200	\pm % FSO
Non-repeatability	0.0100	0.0100	0.0100	\pm % FSO
Minimum dead load output return	0.0250	0.0300	0.0167	\pm % applied load
Creep error (30 minutes)		0.0300	0.0245	\pm % applied load
Creep error (20 minutes)	0.030	0.0450	0.0053	\pm % applied load
Temperature effect on minimum dead load output	(0.001)	0.0140	0.0070	\pm % FSO/5°C (°F)
Temperature effect on sensitivity	(0.0008)	0.0070	0.0050	\pm % applied load/5°C (°F)
Minimum dead load	0			% E_{max}
Maximum safe over load	150			% E_{max}
Ultimate over load	300			% E_{max}
Maximum safe side load	100			% E_{max}
Deflection at E_{max}	0.5/ 0.6/ 1.1/ 0.5/ 0.5/ 0.5/ 0.6/ 0.5/ 0.5/ 0.9/ 0.9			mm
Excitation voltage	5 to 12			V
Maximum excitation voltage	15			V
Input resistance	700 \pm 7			Ω
Output resistance	700 \pm 7			Ω
Insulation resistance	\geq 5000			M Ω
Compensated temperature range	-10 to +40			°C
Operating temperature range	-40 to +80			°C
Storage temperature range	-40 to +90			°C
Element material (DIN)	Nickel plated alloy steel			
Sealing (DIN 40.050 / EN60.529)	IP67			
Recommended torque on fixation bolts	12 to 14			N*m

FSO-Full Scale Output

VISHAY TRANSDUCERS (VT) SALES OFFICES

VT Americas
City of Industry, CA
PH: +1-626-858-8899
FAX: +1-626-332-3418
vt.us@vishaymg.com

VT Netherlands
Breda
PH: +31-76-548-0700
FAX: +31-76-541-2854
vt.nl@vishaymg.com

VMG UK
Basingstoke
PH: +44-125-646-2131
FAX: +44-125-647-1441
vt.uk@vishaymg.com

VMG Israel
Netanya
PH: +972-9-863-8888
FAX: +972-9-863-8800
vt.il@vishaymg.com

VMG Germany
Heilbronn
PH: +49-7131-3901-260
FAX: +49-7131-3901-2666
vt.de@vishaymg.com

VT China
Tianjin
PH: +86-22-2835-3503
FAX: +86-22-2835-7261
vt.prc@vishaymg.com

VMG France
Chartres
PH: +33-2-37-33-31-20
FAX: +33-2-37-33-31-29
vt.fr@vishaymg.com

VT Taiwan*
Taipei
PH: +886-2-2696-0168
FAX: +886-2-2696-4965
vt.roc@vishaymg.com
*Asia except China