


Tank Weighing Assembly

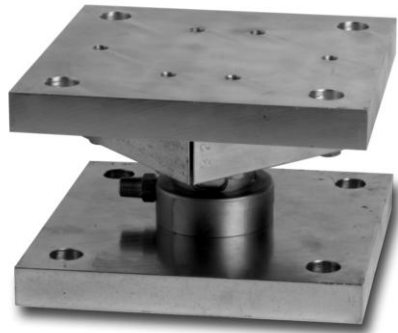

Factory Mutual System
Approved

FEATURES

- Capacity ranges of 50,000 to 1,000,000 pounds
- Mounts directly to foundation or structural support
- Self-checking with provisions for thermal expansion and contraction
- No check rods required
- Monolithic element design
- Exceptional sideloading tolerance
- Low profile/low deflection
- Symmetrical mounting bolt pattern simplifies installation
- Integral conduit adaptor
- Exceeds structural requirements of Uniform Building Code Standards for Seismic Zones 1 and 2
- *Sensorgage*™ sealed to IP67 standards
- Factory Mutual System Approved for Classes I, II, III; Divisions 1 and 2; Groups A through G. Also, non-incendive ratings (No barriers!).

DESCRIPTION

The 65092-TWA is a high capacity steel or stainless steel weighing assembly.

This product has a unique design for silo and hopper weighing. It has high side load rejection, and is able to withstand loads in all directions up to and exceeding its rated capacity with no permanent damage. It is also designed to move in the direction of thermal expansion, guaranteeing accurate measurements regardless of conditions.


Nickel plating or stainless steel and IP67 rated sealing make this load cell suitable for use in outdoor applications as well as applications that are subject to high pressure wash down.

This load cell is rated intrinsically safe by the Factory Mutual (FM), making it suitable for use in potentially explosive environments.

APPLICATIONS

- Tank, bin, and silo weighing
- Level and inventory monitoring
- High capacity weighing

OUTLINE DIMENSIONS in inches

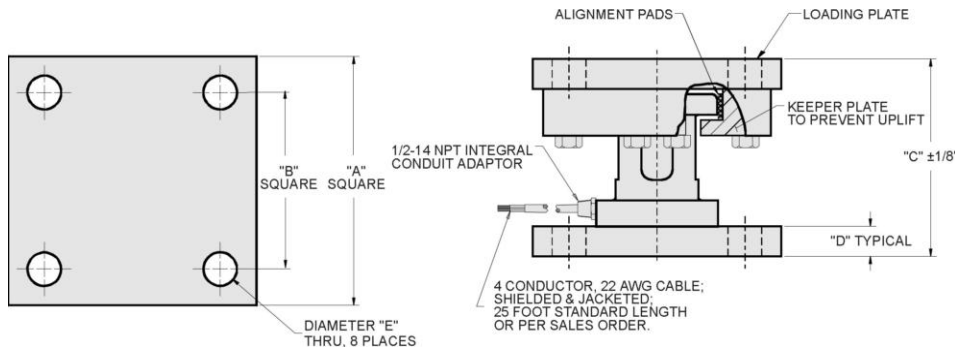

Wiring

+ Excitation	Red
- Excitation	Black
+ Output	Green
- Output	White

CAPACITY	A	B	C	D	E	WEIGHT
50K	8.00	6.00	5.13	0.94	0.78	100.0
100K	10.00	6.50	7.38	1.19	1.12	150.0
200K	12.00	8.50	9.50	1.44	1.63	225.0
300K	14.00	9.50	11.00	1.94	1.63	350.0
500K	17.00	12.00	12.63	2.44	2.13	650.0
750K	24.00	16.50	21.75	3.90	3.50	1800.0
1M	24.00	16.50	21.75	3.90	3.50	2000.0

Capacities are in pounds.

**SPECIFICATIONS**

PARAMETER	VALUE	UNIT
Rated capacity-R.C. (E_{max})	50K, 100K, 200K*	lbs
NTEP/OIML Accuracy class	Standard	
Rated output-R.O.	2	mV/V
Rated output tolerance	0.25	±% mV/V
Zero balance	1.0	±% FSO
Combined error	0.10	±% FSO
Non-repeatability	0.07	±% FSO
Creep error (20 minutes)	0.03	±% FSO
Temperature effect on zero	0.0015	±% FSO/°F
Temperature effect on output	0.0008	±% of applied load/°F
Compensated temperature range	14 to 104 (-10 to 40)	°F (°C)
Operating temperature range	0 to 150 (-18 to 65)	°F (°C)
Storage temperature range	-60 to 185 (-50 to 85)	°F (°C)
Safe sideload	30	% of R.C.
Maximum safe central overload	150	% of R.C.
Ultimate central overload compression	300	% of R.C.
Ultimate central overload tension	100	% of R.C.
Excitation, recommended	10	Vdc or Vac rms
Excitation, maximum	18	Vdc or Vac rms
Input impedance	400 - 500	Ω
Output impedance	349 - 355	Ω
Insulation resistance at 50VDC	>1000	MΩ
Material load cell	Nickel plated alloy tool steel or stainless steel	
Material assembly	Zinc plating	
Environmental protection	IP67	

* Consult factory for capacities up to 1 million lbs.

FSO -Full Scale Output

VISHAY TRANSDUCERS (VT) SALES OFFICES

VT Americas
City of Industry, CA
PH: +1-626-858-8899
FAX: +1-626-332-3418
vt.us@vishaymg.com

VT Netherlands
Breda
PH: +31-76-548-0700
FAX: +31-76-541-2854
vt.nl@vishaymg.com

VMG UK
Basingstoke
PH: +44-125-646-2131
FAX: +44-125-647-1441
vt.uk@vishaymg.com

VMG Israel
Netanya
PH: +972-9-863-8888
FAX: +972-9-863-8800
vt.il@vishaymg.com

VMG Germany
Heilbronn
PH: +49-7131-3901-260
FAX: +49-7131-3901-2666
vt.de@vishaymg.com

VT China
Tianjin
PH: +86-22-2835-3503
FAX: +86-22-2835-7261
vt.prc@vishaymg.com

VMG France
Chartres
PH: +33-2-37-33-31-20
FAX: +33-2-37-33-31-29
vt.fr@vishaymg.com

VT Taiwan*
Taipei
PH: +886-2-2696-0168
FAX: +886-2-2696-4965
vt.roc@vishaymg.com
*Asia except China



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.