

Universal Load Cell



FEATURES

- Capacities: 50 to 10,000kg (50 to 20,000lbs)
- Stainless steel construction
- Suitable for compression and tension applications
- Trimmed output versions standard
- Sealing: IP67
- Certified to OIML R-60, 3000d, NTEP class IIIIL, 10000 divisions

OPTIONAL FEATURE

- FM approved for use in potentially explosive atmosphere

DESCRIPTION

The 9363 is a multipurpose stainless steel S-type load cell which can be used in tension or compression.

This product is suitable for a wide range of hybrid scales, overhead track scales, belt scales and process weighing applications.

Reliable sealing is ensured by the proprietary TRANSEAL potting compound


and additional mechanical protection of the strain gage area.

This product meets the stringent Weights and Measures requirements throughout Europe and the USA.

APPLICATIONS

- Suspended hoppers
- Overhead track scales
- Force measurement

OUTLINE DIMENSIONS in millimeters

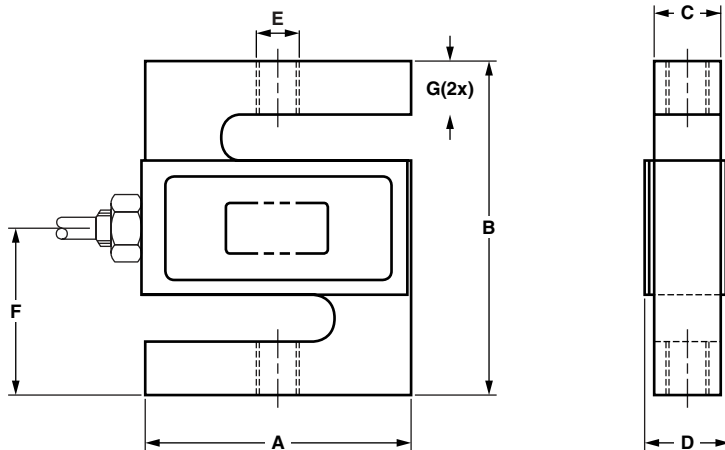

Cable specifications:

Cable length:	6m
Excitation +	Red
Excitation -	Black
Output +	Green
Output -	White
Shield	Transparent

Cable screen is not connected to the load cell body

Cap (kg)	50, 100	250, 500	1000	2500	5000	7500	10000
Cap (lbs)	100, 200, 300	500 - 1.5K	2K, 2.5K	3K*, 5K	10K	15000	20000
A	50.8	50.8	50.8	76.2	74.7	87.4	112.8
B	61.0	61.0	61.0	99.1	99.1	139.7	177.8
C	11.7	18.0	24.4	24.4	30.7	37.1	42.9
D max	16.5	22.9	29.2	29.2	35.6	41.4	47.8
E (kg)	M8 x 1.25-6H	M12 x 1.75-6H		M20 x 1.5-6H8		M24 x 2-6H	M30 x 2-6H
E (lbs)	1/4-28UNF-2B	1/2-20UNF-2B		3/4-16UNF-2B		1-14UNF-2B	1 1/4-12UNF-2B
F	30.5	30.5	30.5	49.5	49.3	69.9	88.9
G	8.9	8.9	8.9	14.0	15.7	22.4	31.8

*3Klb version has 1/2-20UNF-2B holes.



SPECIFICATIONS

PARAMETER	VALUE			UNIT
Standard capacities (E_{max})	50, 100, 250, 500, 1000, 2500, 5000, 7500, 10000*			kg
Standard capacities (E_{max})	50, 75, 100, 150, 200, 250, 300, 500, 750, 1K, 1.5K, 2K, 3K, 5K, 10K, 15K, 20K			lbs
Accuracy class per OIML R-60 / NTEP	NTEP III	Non-Approved	OIML C3	
Maximum no. of verification intervals (n)	10000	D3	3000	
Minimum verification intervals (V_{min})			$E_{max}/9000$	
Rated output (=FS)	3.0			mV/V
Rated output tolerance	0.0075			±mV/V
Zero balance	1.0			±% FSO
Combined error	0.0200	0.0300	0.0200	±% FSO
Non-repeatability	0.0100	0.0100	0.0100	±% FSO
Minimum dead load output return		0.0300	0.0165	±% applied load
Temp. effect on min. dead load output	(0.001)	(0.0015)	0.0140	±% FSO/5°C (°F)
Temperature effect on sensitivity	(0.0008)	(0.0008)	0.0055	±% applied load/5°C (°F)
Maximum safe over load	150			% E_{max}
Ultimate over load	250			% E_{max}
Excitation voltage	5 to 12			V
Maximum excitation voltage	15			V
Input resistance	390±15			Ω
Input resistance (Trimmed version)	390±15	430±60		Ω
Output resistance	350±3.5			Ω
Insulation resistance	≥5000			MΩ
Compensated temperature range	14 to +104°F	-10 to +40		°C
Operating temperature range	-65 to +200°F	-40 to +80		°C
Element material (DIN)	Stainless steel			
Sealing (DIN 40.050)	IP67			

* 10000kg is not OIML approved

FSO-Full Scale Output

VISHAY TRANSDUCERS (VT) SALES OFFICES

VT Americas
 City of Industry, CA
 PH: +1-626-858-8899
 FAX: +1-626-332-3418
 vt.us@vishaymg.com

VT Netherlands
 Breda
 PH: +31-76-548-0700
 FAX: +31-76-541-2854
 vt.nl@vishaymg.com

VMG UK
 Basingstoke
 PH: +44-125-646-2131
 FAX: +44-125-647-1441
 vt.uk@vishaymg.com

VMG Israel
 Netanya
 PH: +972-9-863-8888
 FAX: +972-9-863-8800
 vt.il@vishaymg.com

VMG Germany
 Heilbronn
 PH: +49-7131-3901-260
 FAX: +49-7131-3901-2666
 vt.de@vishaymg.com

VT China
 Tianjin
 PH: +86-22-2835-3503
 FAX: +86-22-2835-7261
 vt.prc@vishaymg.com

VMG France
 Chartres
 PH: +33-2-37-33-31-20
 FAX: +33-2-37-33-31-29
 vt.fr@vishaymg.com

VT Taiwan*
 Taipei
 PH: +886-2-2696-0168
 FAX: +886-2-2696-4965
 vt.roc@vishaymg.com
 *Asia except China



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.