

## Digital Compression Load Cell



### FEATURES

- Capacities: 10 - 100 ton
- Digital output via RS-485 or RS-422 interface
- Low profile, multi-column, stainless steel construction
- Hermetically sealed, IP66 and IP68
- Certified to OIML R-60, 4000d
- Multiple-range versions available
- Internal diagnostics and lightning protection
- 240,000 counts resolution
- Maximum transmission distance 1200m

### DESCRIPTION

The SCC is a multi-column, low profile, stainless steel, compression load cell with a digital output signal.

This digital output enables the user to communicate with each SCC independently of the others in the system, thus offering advantages in system setup, system control, corner correction, fault finding and load cell replacement.


Suitable applications for this product include various types of road and rail weighbridges, and process weighing.

This product meets the stringent Weights and Measures requirements throughout Europe.

### APPLICATIONS

- Weighbridges
- Silo hopper weighing

### OUTLINE DIMENSIONS in millimeters

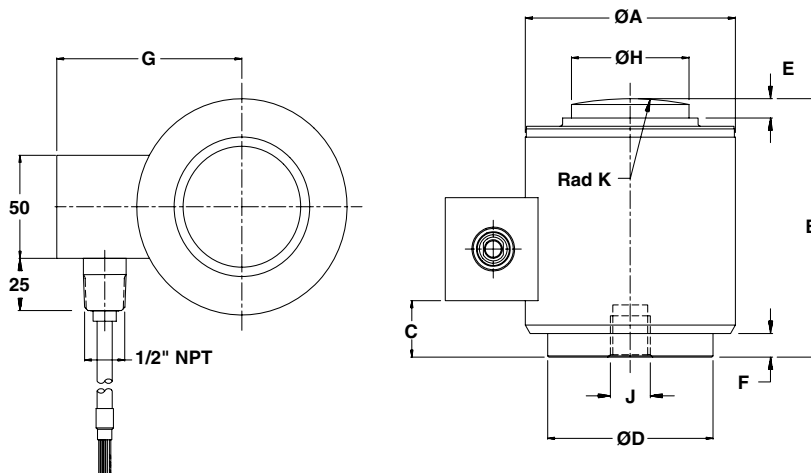

#### Cable specifications:

Cable length: 10 meters for 10t  
20 meters all others

Excitation + Green  
Excitation - Black  
Rx + Yellow  
Rx - Blue  
Tx + Red  
Tx - White  
Shield Clear

Note: Dimensions are in millimeters

Capacity (t)	10, 25	40, 60	100
A	73.0	105.0	152.4
B	82.5	127.0	184.2
C	7.0	29.0	67.5
D	58.0	82.5	123.8
E	6.5	8.0	23.6
F	1.8	11.0	21.8
G	79.5	99.0	124.8
H	31.8	58.7	79.2
J	M12x1.75 (11 Deep)	M20x2.5 (20 Deep)	
K Rad	152.0	152.0	432.0



### SPECIFICATIONS

PARAMETER	VALUE			UNIT
Standard capacities ( $E_{max}$ )	10, 25, 40, 60, 100			ton
Accuracy class according to OIML R-60	<b>CC</b>	<b>C3</b>	<b>C4</b>	
Maximum no. of verification intervals (n)		3000	4000	
Minimum verification interval ( $V_{min}=E_{max}/Y$ )		$E_{max}/10000$	$E_{max}/10000$	
Minimum verification interval, type MR		$E_{max}/20000$	$E_{max}/20000$	
Rated output (FSO)	240,000			counts
Tolerance on rated output	200			±counts
Zero balance	200			±counts
Combined error	0.0500	0.0200	0.0173	±% FSO
Non-repeatability	0.0200	0.0100	0.0090	±% FSO
Minimum dead load output return	0.0500	0.0167	0.0125	±% FSO
Creep error (30 minutes)	0.0600	0.0245	0.0184	±% FSO
Temp. effect on min. dead load output	0.0250	0.0070	0.0070	±% FSO/5°C
Temp. effect on min. dead load output MR		0.0035	0.0035	±% FSO/5°C
Temperature effect on sensitivity	0.0250	0.0050	0.0040	±% FSO/5°C
Compensated temperature range	-10 to +40			°C
Operating temperature range	-40 to +80			°C
Storage temperature range	-40 to +90			°C
Maximum safe over load	150			% $E_{max}$
Ultimate over load	400			% $E_{max}$
Maximum safe side load	10			% $E_{max}$
Deflection at $E_{max}$	0.36 max			mm
Excitation voltage	12.5 to 18.0			Vdc
Maximum excitation voltage	15			Vdc
Maximum current consumption	80			mA
Start up current	150			mA
Insulation resistance	>5000			MΩ
Element material (DIN)	Stainless steel 1.4542			
Sealing (DIN 40.050 / EN60.529 / IEC 529)	IP66 and IP68			
Signal update per second	25			
Baudrate	9600			Bits/s
Transmission type	Asynchronous serial transmission			
Start bits	1			
Data bits	7			
Stop bits	1			
Parity	Odd			
Maximum transmission cable length	1200			m
Data transmission interface	RS422 (4 communication wires)/RS485 (2 communication wires)			

FSO - Full Scale Output

### VISHAY TRANSDUCERS (VT) SALES OFFICES

**VT Americas**  
 City of Industry, CA  
 PH: +1-626-858-8899  
 FAX: +1-626-332-3418  
 vt.us@vishaymg.com

**VT Netherlands**  
 Breda  
 PH: +31-76-548-0700  
 FAX: +31-76-541-2854  
 vt.nl@vishaymg.com

**VMG UK**  
 Basingstoke  
 PH: +44-125-646-2131  
 FAX: +44-125-647-1441  
 vt.uk@vishaymg.com

**VMG Israel**  
 Netanya  
 PH: +972-9-863-8888  
 FAX: +972-9-863-8800  
 vt.il@vishaymg.com

**VMG Germany**  
 Heilbronn  
 PH: +49-7131-3901-260  
 FAX: +49-7131-3901-2666  
 vt.de@vishaymg.com

**VT China**  
 Tianjin  
 PH: +86-22-2835-3503  
 FAX: +86-22-2835-7261  
 vt.prc@vishaymg.com

**VMG France**  
 Chartres  
 PH: +33-2-37-33-31-20  
 FAX: +33-2-37-33-31-29  
 vt.fr@vishaymg.com

**VT Taiwan\***  
 Taipei  
 PH: +886-2-2696-0168  
 FAX: +886-2-2696-4965  
 vt.roc@vishaymg.com  
 \*Asia except China



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.