


Analog Weight Transmitter

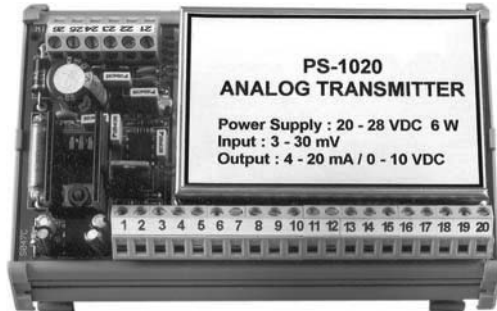

FEATURES

- Complete load cell signal conditioner
- Precise 10Vdc excitation supply for up to 4 load cells
- Selectable 0-5, 0-10Vdc or 4-20mA analog output
- Independent zero and span adjustments
- DIN rail “snap track” mounting
- Adjustable analog filtering

DESCRIPTION

PS-1020 transmitters are self-contained load cell signal conditioners designed around a precision analog instrumentation amplifier. Units are 24Vdc powered and provide a well regulated excitation supply for up to four 350 ohm bridge load cells. Simple configuration is accomplished using DIP switches and trim pots. Integral load cell summing eliminates the need for external junction boxes.

Typical applications include bin or hopper conversion and ingredient inventory measurement systems.

Standard ABS plastic, DIN rail design allows mounting close to the system


transducers, thereby reducing installation costs. An integral 20-position terminal strip provides connections for up to four load cell transducers. All electrical connections are secured with screw terminals.

BLH offers the PS-121, 24Vdc power supply (data sheet #12155), for PS-1020 operation.

APPLICATIONS

- Silo, bin, and hopper weighing
- Inventory measurement and control
- Panel meter signal generator
- Analog data loggers

CONFIGURATION

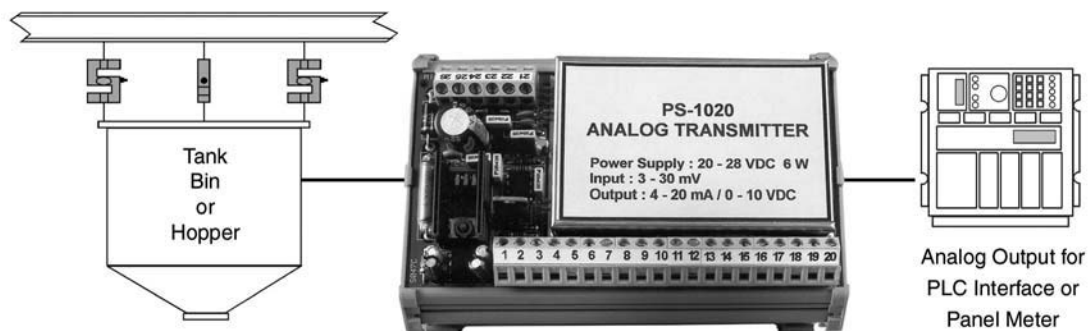

SPECIFICATIONS

PERFORMANCE

Full Scale Range	3mV to 30mV
Linearity	±0.2% of full scale
Excitation Voltage	10Vdc
Load Current	200mA (four - 350 ohm load cells)
Thermal Stability	50ppm/°C (full scale range) (28ppm/°F)

ENVIRONMENTAL

Operating Temperature	-4 to +40°C (+14 to +104°F)
Storage Temperature	-20 to +50°C (-4 to +122°F)
Relative Humidity	85% rh, non-condensing

ELECTRICAL

Input Voltage	24Vdc±15% 50/60Hz
Power Consumption	6 watts max

ANALOG OUTPUT (jumper selectable)

Voltage	0 to 5, or 0 to 10Vdc (2K ohm min load)
Current	4 to 20mA (500 ohm max load)

CONFIGURATION

Coarse Zero	4-position DIP-switch
Fine Zero	20-turn trim pot
Coarse Span	4-position DIP-switch
FineSpan	20-turn trim pot
Analog Filter	adjustable, 270° turn trim pot

ENCLOSURE

Overall Dimensions	see outline drawing below
Mounting	DIN rail mount
Material	ABS plastic
Weight	212.6 grams (7.5 ounces)
Wiring Connections	terminal blocks, pitch 5.08mm (0.196 inch)

OPTIONS


115VAC Power Supply	DIN rail mount
NEMA 4X Enclosure	wall mount 254 x 203 x 102 mm (10 x 8 x 4 inches)

APPROVALS

CE	EN 50081-1, 50082-2, 61010-1
----	------------------------------

BLH is continually seeking to improve product quality and performance. Specifications may change accordingly.

OUTLINE DIMENSIONS

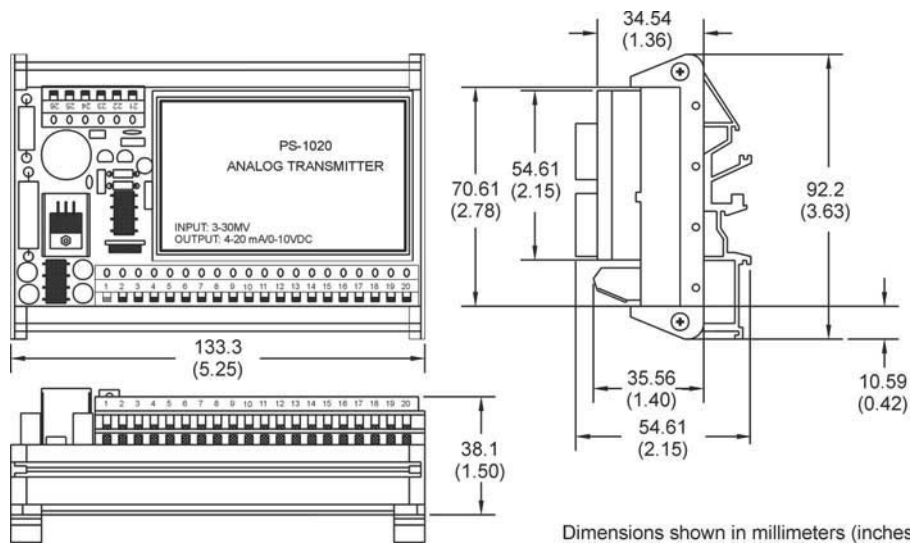

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.