

Weight Indicator



FEATURES

- Large 6 digit LED (VT200) or LCD (VT220) display
- Built-in weighing and counting modes
- Two opto-isolated setpoints
- Alibi (Flash) memory retains last 10,000 transactions
- Dual scale operation (optional)
- Two serial ports for printing and networking (one standard)
- Analog output (option)
- Stainless steel enclosure (IP65), aluminum enclosure (option)
- Programmable ticket format
- High sample rate - up to 70 conversions per second
- OIML R-76 and NTEP approved to 10000d
- Battery operation (optional with aluminum enclosure)
- Real time clock (option)

DESCRIPTION

VT200/VT220 units are versatile, general purpose weight indicators, with a wide range of industrial and commercial applications.

The eight key panel enables easy operation, calibration, and setup of the instrument. An integral printer interface allows easy, programmable, ticket formatting. Automatic date and time storage with the real-time clock option clearly documents all printout records

The VT220 with the LCD display includes internal rechargeable battery option for stand-alone autonomous operation.

Enclosure selections include tilted, wallmount, and desktop arrangements.


APPLICATIONS

- Bench and floor scales
- Counting scales
- Inventory control
- Various industrial weighing systems

OPTIONS

- Aluminum enclosure
- Stainless steel enclosure
- UL/TUV/UK power adapter
- LED/LCD display
- Analog input
- Analog output
- Second RS-232 port
- RS-485 port
- Real time clock
- Battery (for aluminum only)

CONFIGURATION

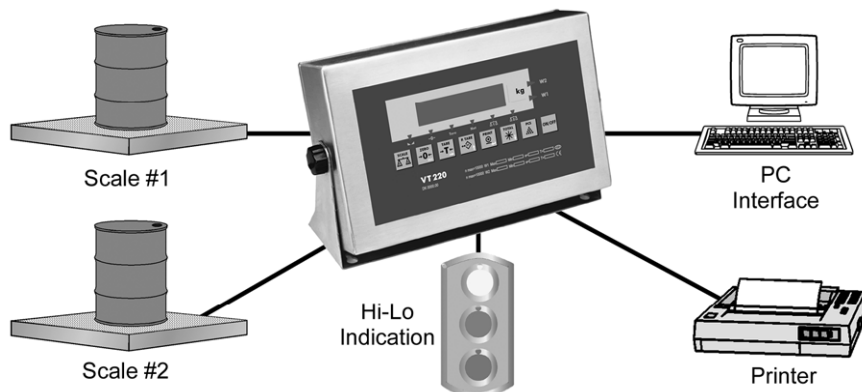

SPECIFICATIONS

PERFORMANCE

Resolution: selectable up to 990000 dd
 Conversion Speed: 3 - 70 samples per second (selectable)
 Sensitivity: 0.4 μ V/Vsi for approved scales, 0.1 μ V/Vsi for non-approved scales.
 Full Scale Range: -0.25 to 1.75mV/V [-1.25mV to 8.75mV] or -0.25 to 3.75mV/V [-1.25mV to 18.75mV]
 Linearity: 0.002% of full scale
 Long Term Stability: 0.005% of full scale per year
 Excitation: +5V alternating polarity or +5VDC (selectable), with sense (6 wires)
 Number of Cells: Up to 10, 350 ohm load cells
 Filter: FIR automatically adjusted to conversion speed, Rolling average.
 Offset Drift: \leq 2ppm/ $^{\circ}$ C
 Span Drift : \leq 2ppm/ $^{\circ}$ C
 A/D Converter Type: Sigma-Delta, ratiometric
 Count By: x1, x2, x5, x10, x50
 Decimal Point: between any digits of the weight display
 Calibration Methods: dead load and span, or data sheets calibration, via the mV/V output values of the load cell. Calibration of two analog inputs (optional) with individual coefficients.
 Weighing Functions: automatic zero tracking, motion detection, auto-zero on power-up, zero tare, preset tare, net mode, multiple test functions
 Memory Allocation: calibration data EEPROM, Flash tally-roll (Alibi) memory capable of 10,000 weight registrations
 Piece Counting Mode
 Real-Time Clock (optional)

ENVIRONMENTAL

Operating Temp: -10 $^{\circ}$ C to +40 $^{\circ}$ C [14 $^{\circ}$ F to 104 $^{\circ}$ F]
 Storage Temp: -10 $^{\circ}$ C to +70 $^{\circ}$ C [-4 $^{\circ}$ F to 158 $^{\circ}$ F]
 Relative Humidity: 40-90% RH, non-condensing

DISPLAY AND KEYBOARD

Display: 6 digit, 7 segment, LED or LCD
 Digit Height: 20mm (VT200), 16mm (VT220)
 Status Enunciators: no motion, zero, tare in use, net, scale in operation (#1 or #2 or sum #1+2, if second scale connected), piece counting mode
 Weight Digits: 4, 5 or 6 (setup selectable)
 Keyboard: 8 key membrane keyboard, with tactile feedback

ELECTRICAL

Voltage: 85 - 265VAC
 Current: 500mA
 Battery Operation (Option): Internal rechargeable battery (VT220) Aluminum version only

ISOLATED ANALOG OUTPUT (OPTIONAL)

Resolution: 16 bit DAC
 Voltage Output: 0.02-10V
 Current: 0-20mA or 4-20mA
 Linearity: 0.002% of full scale
 Offset Drift: \leq 2ppm/ $^{\circ}$ C

INPUT & OUTPUTS

(x1) Logic Input: 9-24VDC, negative common, opto-isolated to 2.5KV.
 (x2) Logic Output: 24Vdc \pm 10%, positive common, max current 100mA, opto-isolated to 2.5KV.

SERIAL COMMUNICATION

Serial Output #1: RS-232, non-programmable
 Baud Rate: 2400 baud, full duplex
 Applications: continuous, print (on demand), alibi print
 Serial Output #2 (Optional): RS-232 or RS-485 setup programmable
 Baud Rate: 2400 - 57800 baud, half duplex
 Applications: EDP output, master-slave protocols, continuous output, remote printer

ENCLOSURE

Stainless Steel Enclosure:
 Dimensions: 252x152x62mm LxHxD [10x6x2.5in. LxHxD]
 Mounting: Wall and tilt mount
 Protection: IP65
 Wiring Connections: Cable glands
 Aluminium Enclosure:
 Dimensions: 194x100x107mm LxHxD [7.64x3.94x4.21in. LxHxD]
 Mounting: Desktop
 Protection: IP40
 Wiring Connections: D-sub connectors

APPROVALS (ACCURACY CLASS III / IIIL)

OIML R-76: 10000d single or dual interval EU-type approval no. DK0199.62
 NTEP: 10000d single or dual interval NTEP CC#.....

Transducers is continually seeking to improve product quality and performance. Specifications may change accordingly.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.