

Strain Gage Adhesive



OTHER ACCESSORIES USED IN AN M-BOND 610 INSTALLATION:

- CSM Degreaser or GC-6 Isopropyl Alcohol
- Silicon-Carbide Paper
- M-Prep Conditioner A
- M-Prep Neutralizer 5A
- GSP-1 Gauze Sponges
- CSP-1 Cotton Applicators
- MJG-2 Mylar® Tape
- TFE-1 Teflon® Film
- HSC Spring Clamp
- GT-14 Pressure Pads and Backup Plates



RoHS
COMPLIANT

DESCRIPTION

Two-component, solvent-thinned, epoxy-phenolic adhesive for high-performance applications, including high-precision transducers. Solids content 22%. Widest temperature range general-purpose adhesive available. Low viscosity, capable

of gluelines <0.0002 in [0.005mm]. Extremely thin, hard, void-free gluelines minimize creep, hysteresis, and linearity problems. Cure must begin within four hours of application.

CHARACTERISTICS

Operating Temperature Range:

Short Term: -452° to +700°F [-269° to +370°C].

Long Term: -452° to +500°F [-269° to +260°C].

Transducers: to +450°F [+230°C].

Elongation Capabilities:

1% at -452°F [-269°C];

3% at +75°F [+24°C];

3% at +500°F [+260°C].

Shelf Life:

Minimum 9 months at +75°F [+24°C]; or 15 months at +40°F [+5°C].

Pot Life:

6 weeks at +75°F [+24°C]; 12 weeks at +40°F [+5°C].

Clamping Pressure:


10 to 70psi [70 to 480kN/m²].

30 to 40psi optimum [200 to 275kN/m²].

Cure Requirements:

Recommended Postcure: 2 hours at 50° to 75°F [30° to 40°C] above maximum operating temperature or cure temperature, whichever is higher.

High Precision Transducer Postcure: 2 hours at +400° to +450°F [+205° to +230°C] after wiring.

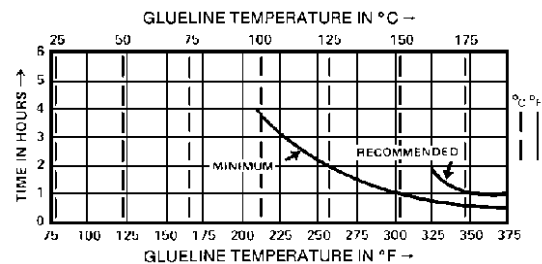

PACKAGING OPTIONS

Kit:

- 4 bottles [11g ea] Curing Agent
- 4 bottles [14g ea] Resin
- 4 brush caps for dispensing mixed adhesive
- 4 disposable mixing funnels

Single Mix Kit:

- 1 bottle [11g ea] Curing Agent
- 1 bottle [14g ea] Resin
- 1 brush cap for dispensing mixed adhesive
- 1 disposable mixing funnel

References:

Instruction Bulletin B-130, "Strain Gage Installations with M-Bond 43-B, 600 and 610 Adhesive Systems," included in each kit.

Mylar and Teflon are Registered Trademarks of DuPont

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.